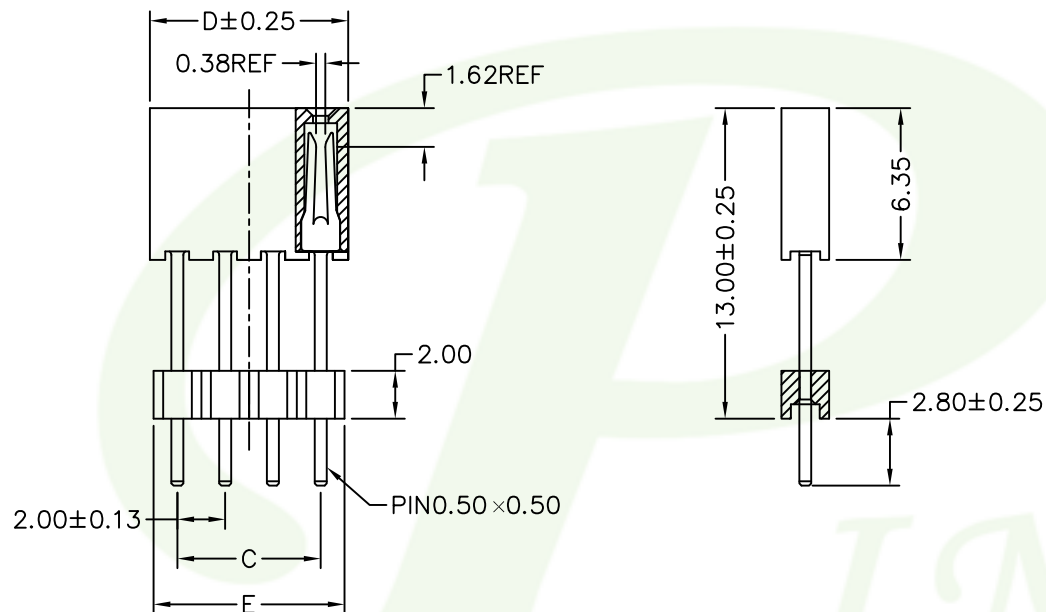



Recommended P.C.B Layout

MATERIAL

Insulator : Thermoplastic High Temp UL94-V0
Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rating : 2 AMP
Insulation Resistance : 1000MΩMin.
Contact Resistance : 20mΩMax.
Dielectric Voltage : AC 500V for one minute

62H-x 1- xx x x xx
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- 2: Dual rows
- No. of contacts per row
- G: Gold flash
- T: Tin plated
- B: Black Insulator
- W: White Insulator
- Pinrex internal code

No. of PIN/ROW	Dimension Information		
	Dim.C	Dim.D	Dim.E
02	2.00	4.30	4.00
03	4.00	6.30	6.00
04	6.00	8.30	8.00
05	8.00	10.30	10.00
06	10.00	12.30	12.00
07	12.00	14.30	14.00
08	14.00	16.30	16.00
09	16.00	18.30	18.00
10	18.00	20.30	20.00
11	20.00	22.30	22.00
12	22.00	24.30	24.00
13	24.00	26.30	26.00
14	26.00	28.30	28.00
15	28.00	30.30	30.00
16	30.00	32.30	32.00
17	32.00	34.30	34.00
18	34.00	36.30	36.00
19	36.00	38.30	38.00
20	38.00	40.30	40.00
21	40.00	42.30	42.00
22	42.00	44.30	44.00
23	44.00	46.30	46.00
24	46.00	48.30	48.00
25	48.00	50.30	50.00
26	50.00	52.30	52.00
27	52.00	54.30	54.00
28	54.00	56.30	56.00
29	56.00	58.30	58.00
30	58.00	60.30	60.00



				TOLERANCE				OLD PART NO.		TITLE FEMALE HEADER 2.0*2.0mm STRAIGHT TYPE, SINGLE ROW HEIGHT 6.35mm		 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.							
				.0 =±.30		UNITS : mm		DRAWER 麦文慧						CHECK 李剑					
				.00 =±.20															
				.000 =±.XXX															
A		RELEASE		2020/10/30		.0000=±.		SCALE NONE		SIZE A4		REV. A		APP'D 李剑		NEW PART NO. 62H-x1-xxxxxx		DRAW NO. 62H-x1-xxxxxx(網頁專用圖)	
REV.		DESCRIPTION		DATE		ANG.=±3'													