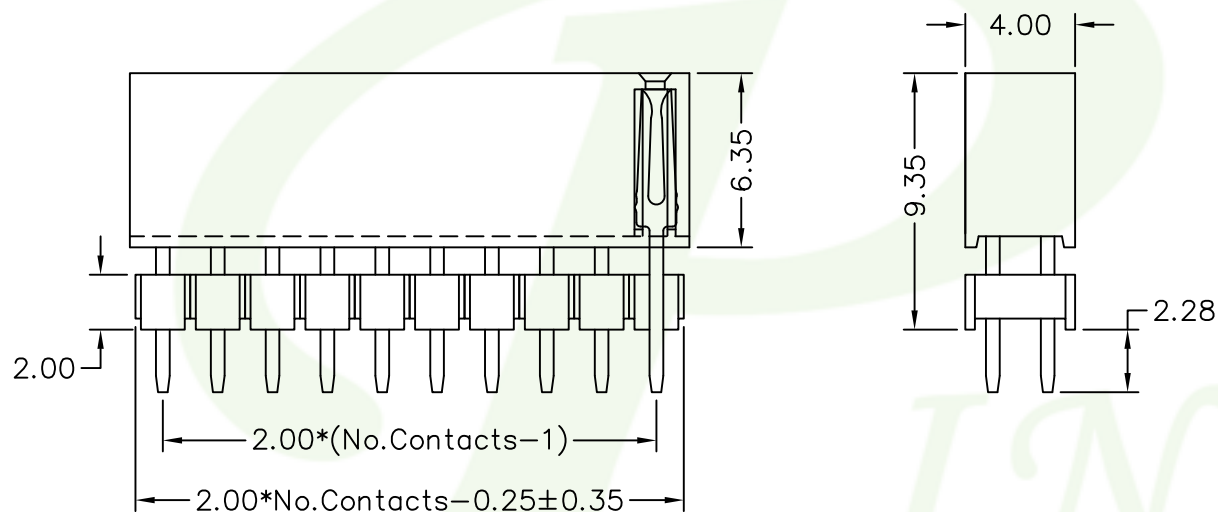
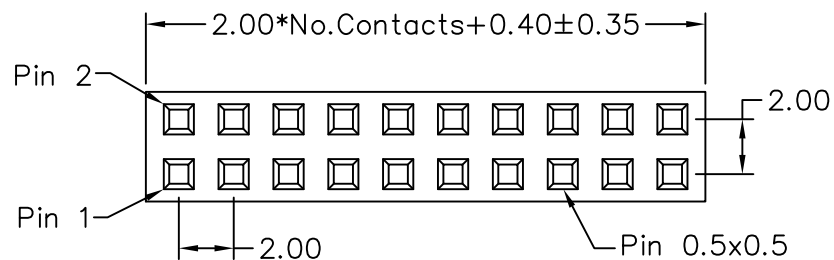


Recommended P.C.B Layout

MATERIAL

Insulator : Thermoplastic High Temp UL94-V0
Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin.
Contact Resistance : 20mΩMax.
Dielectric Voltage : AC 500V for one minute
Operating Temperature: -40°C to +105°C

62H-x 2- xx x x xx
1 2 3 4 5 6

- 7: Green Product
9: Green Product High Temp
- 1: Single row
2: Dual rows
- No. of contacts per row
- G: Gold flash
T: Tin plated
- B: Black Insulator
- Pinrex internal code



6 Pin 以上管装

			TOLERANCE		UNITS : mm		OLD PART NO.		TITLE		 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0	=±.30					FEMALE HEADER 2.0*2.0mm		
			.00	=±.20			DRAWER	麦文慧	ELEVATED S/T, DUAL ROWS		
			.000	=±.XXX			CHECK	李劍	HEIGHT 6.35mm		
A	RELEASE	2020/11/03	.0000=±.		SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
REV.	DESCRIPTION	DATE	ANG.=±3'		NONE	A4	1 OF 1	A	李劍	62H-x2-xxxxxx	62H-x2-xxxxxx(網頁專用圖)