

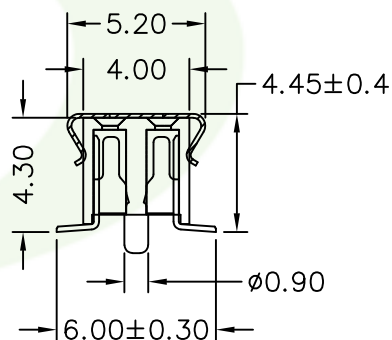
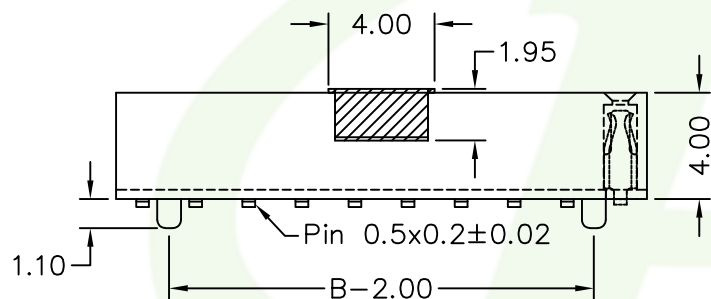


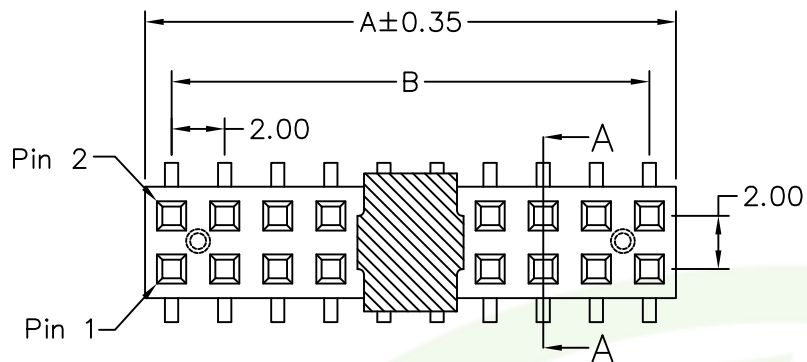

Section A-A

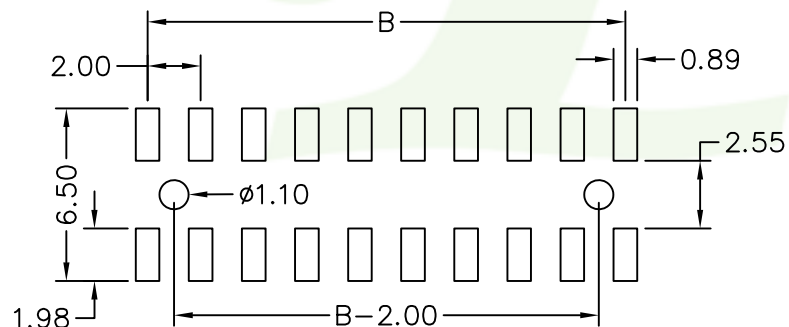

Recommended P.C.B Layout

MATERIAL

Insulator : Thermoplastic High Temp UL94-V0

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

62E-x 2- xx x x xx
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 2: 1: Single row
- 2: Dual rows
3. No. of contacts per row
4. G: Gold flash
- T: Tin plated
5. B: Black Insulator
6. Pinrex internal code.

POLES	DIM A	DIM B	POLES	DIM A	DIM B	POLES	DIM A	DIM B
			16	32.00	30.00	31	62.00	60.00
2	4.00	2.00	17	34.00	32.00	32	64.00	62.00
3	6.00	4.00	18	36.00	34.00	33	66.00	64.00
4	8.00	6.00	19	38.00	36.00	34	68.00	66.00
5	10.00	8.00	20	40.00	38.00	35	70.00	68.00
6	12.00	10.00	21	42.00	40.00	36	72.00	70.00
7	14.00	12.00	22	44.00	42.00	37	74.00	72.00
8	16.00	14.00	23	46.00	44.00	38	76.00	74.00
9	18.00	16.00	24	48.00	46.00	39	78.00	76.00
10	20.00	18.00	25	50.00	48.00	40	80.00	78.00
11	22.00	20.00	26	52.00	50.00			
12	24.00	22.00	27	54.00	52.00			
13	26.00	24.00	28	56.00	54.00			
14	28.00	26.00	29	58.00	56.00			
15	30.00	28.00	30	60.00	58.00			



			TOLERANCE				OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.		
			.0	±.30	UNITS : mm		DRAWER 麦文慧		CHECK 李劍			FEMALE HEADER 2.0*2.0mm S/T TYPE, DUAL ROWS HEIGHT 4.0mm,CAP+T/R	
			.00	±.20									
			.000	±.XXX									
A RELEASE			.0000±.		SCALE NONE		SIZE A4		SHEET 1 OF 1			REV. A	
REV. DESCRIPTION			ANG.=±3'						APP'D 李劍			NEW PART NO. 62E-x2-xxxxxx	
												DRAW NO. 62E-x2-xxxxxx (網頁專用圖)	