
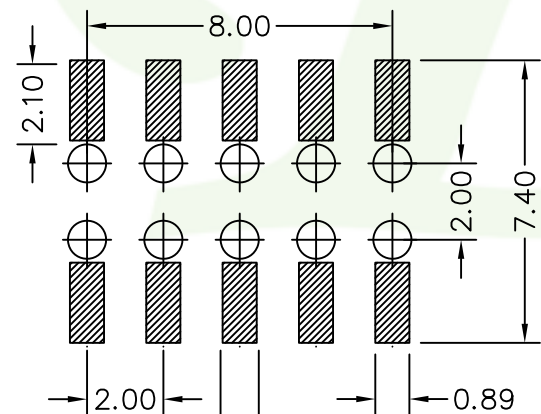
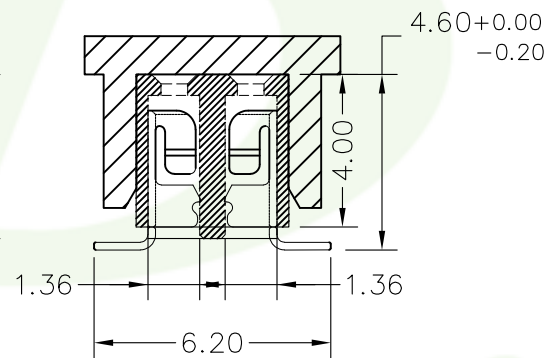
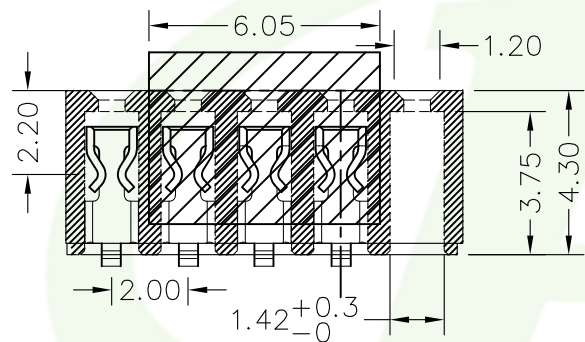


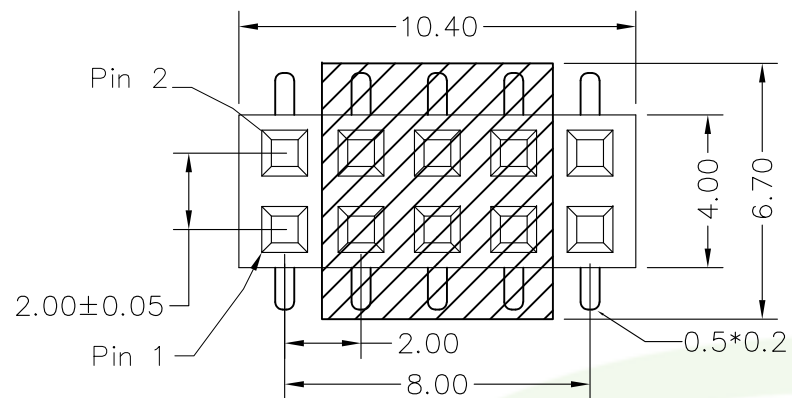

Top view

Recommended P.C.B Layout

MATERIAL

Insulator : Thermoplastic High Temp UL94-V0
Contact Pin : Phosphor Bronze
CAP: NY6T

SPECIFICATION

Current Rating : 2.0 Amps max
Insulation Resistance : 5000MΩMin.
Contact Resistance : 20mΩMax.
Dielectric Voltage : AC 500V for one minute
适用波峰焊制程温度: 260°C±5°C 3~5s

62G-x 2- xx x x xx
1 2 3 4 5 6

- 7: Green Product
9: Green Product High Temp
- 1: Single row
2: Dual rows
- No. of contacts per row
- G: Gold flash
T: Tin plated
S: 10u"Gold plated
- B: Black Insulator
- Pinrex internal code.
CAP: 925-20-00046B



			TOLERANCE		UNITS : mm	OLD PART NO.		TITLE PS2.0 SMT H=4.3 2*05P(塑底有橫- 下 插款) L 黑半金霧錫 10u" 無柱 展開6.2 CAP+T/R PCP032	頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0 =±.30			DRAWER 麦文慧	CHECK 李剑		
			.00 =±.20		SCALE NONE	SHEET 1 OF 1	REV. A	NEW PART NO. 62G-x2-xxxxxx	DRAW NO. 62G-x2-xxxxxx(網頁專用圖)
			.000 =±.XXX		SIZE A4		APP'D 李剑		
A	RELEASE	2020/10/30	.0000=±.						
REV.	DESCRIPTION	DATE	ANG.=±3'						