

MATERIAL

Contact Pin : Phosphor Bronze

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.





Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C


621-x 1- xx x x xx
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- 2: Dual rows
- No. of contacts per row
- G: Gold flash
- S: Selective
- T: Tin plated
- B: Black Insulator
- Pinrex internal code.
- B Type
- A Type

POLES	DIM A	DIM B	POLES	DIM A	DIM B
			21	42.00	40.00
2	4.00	2.00	22	44.00	42.00
3	6.00	4.00	23	46.00	44.00
4	8.00	6.00	24	48.00	46.00
5	10.00	8.00	25	50.00	48.00
6	12.00	10.00	26	52.00	50.00
7	14.00	12.00	27	54.00	52.00
8	16.00	14.00	28	56.00	54.00
9	18.00	16.00	29	58.00	56.00
10	20.00	18.00	30	60.00	58.00
11	22.00	20.00	31	62.00	60.00
12	24.00	22.00	32	64.00	62.00
13	26.00	24.00	33	66.00	64.00
14	28.00	26.00	34	68.00	66.00
15	30.00	28.00	35	70.00	68.00
16	32.00	30.00	36	72.00	70.00
17	34.00	32.00	37	74.00	72.00
18	36.00	34.00	38	76.00	74.00
19	38.00	36.00	39	78.00	76.00
20	40.00	38.00	40	80.40	78.00

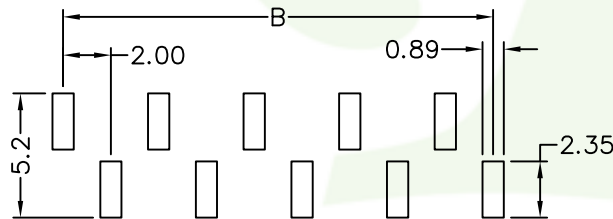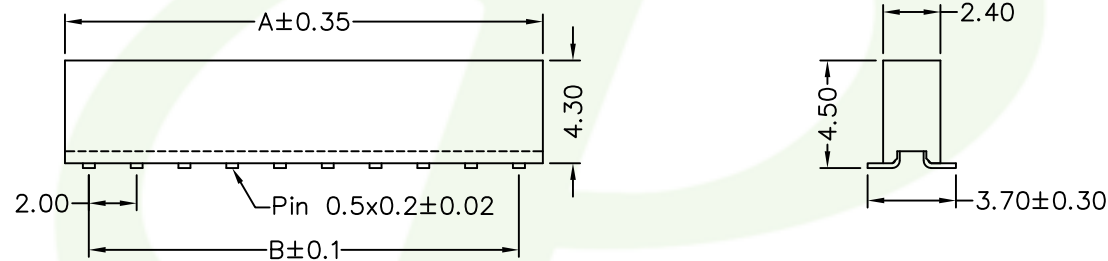

A TYPE

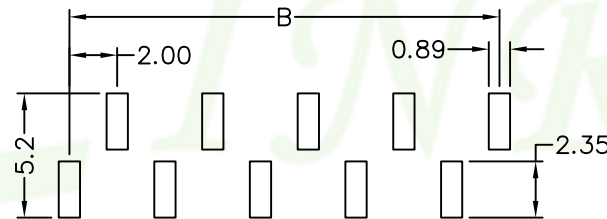

B TYPE

Recommended P.C.B Layout

				TOLERANCE				OLD PART NO.		TITLE		 頻銳科技股份有限公司	
				.0 =±.30		UNITS : mm		DRAWER 姜文慧		CHECK 李劍		FEMALE HEADER 2.0*2.0mm	
				.00 =±.20								SMT TYPE, SINGLE ROW	
				.000 =±.XXX								HEIGHT 4.3mm	
A RELEASE				2020/11/05		SCALE NONE		SHEET 1 OF 1		REV. A		NEW PART NO. 621-x1-xxxxxxx	
REV. DESCRIPTION				DATE		SIZE A4		APP'D 李劍				DRAW NO. 621-x1-xxxxxxx (網頁專用圖)	