
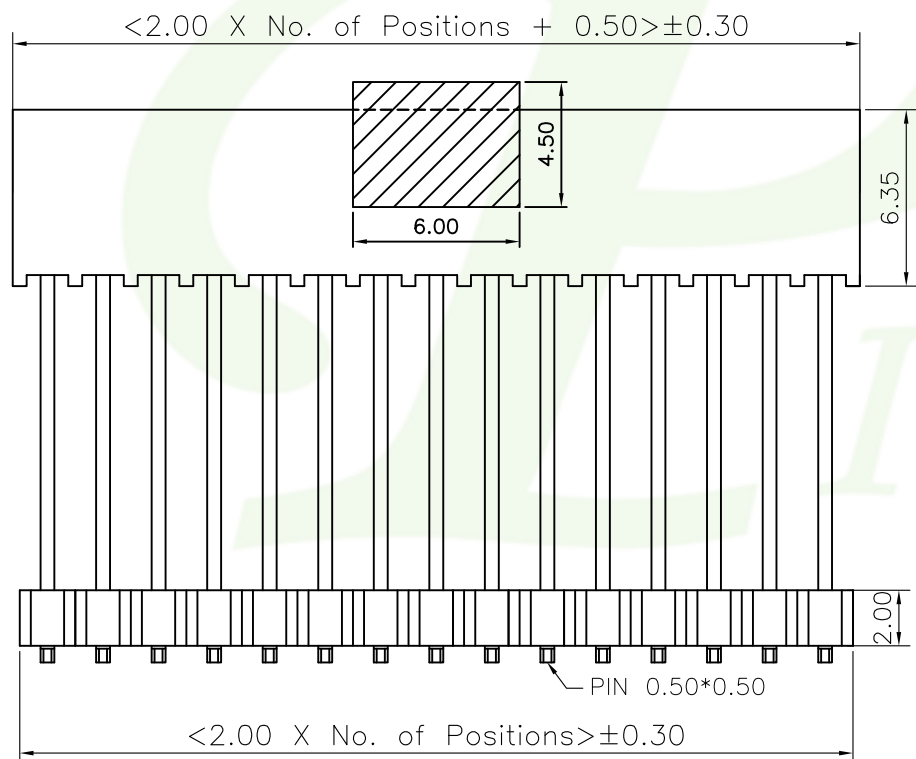


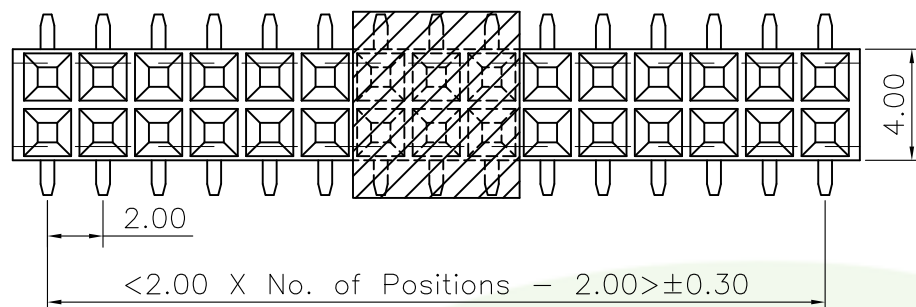

Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC

Contact Resistance: 20mΩ Max.


Operating Temperature: -65°C to +105°C

Materials

Contact Material: Brass


Insulator : Thermoplastic High Temp UL94-V0

All materials must be RoHS materials

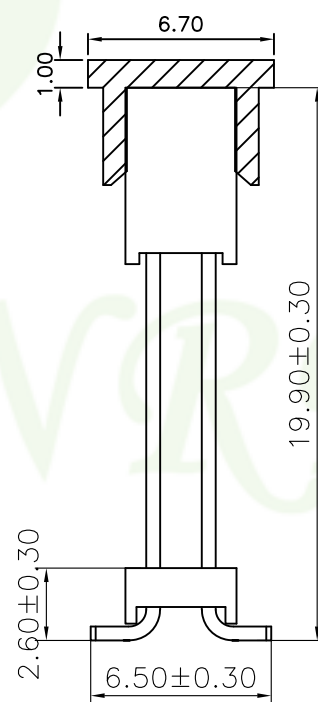

62Q-x 2- xx x x xxxx
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- 2: Dual rows
- 3: No. of contacts per row
- 4: G: Gold flash
T: Tin plated
- 5: B: Black Insulator
- 6: Pinrex internal code.

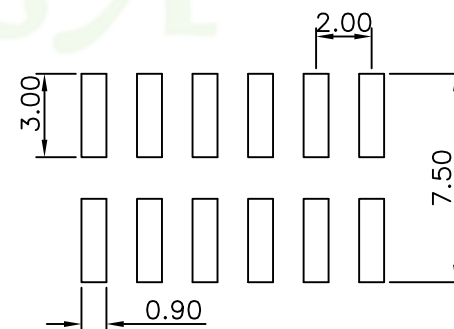

Recommended P.C.B. Layout

			TOLERANCE		 UNITS : mm	OLD PART NO.		TITLE FEMALE HEADER 2.0*2.0mm SMT TYPE, DUAL ROWS HEIGHT 6.35mm CAP+T/R		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.	
			.0	=±.30		DRAWER	CHECK				
			.00	=±.20		麦文慧	李劍				
			.000	=±.XXX							
A	RELEASE	2020/11/03	.0000=±.		SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
REV.	DESCRIPTION	DATE	ANG.=±3'		NONE	A4	1 OF 1	A	李劍	62Q-x2-xxxxxxx	62Q-x2-xxxxxxx(網頁專用圖)