
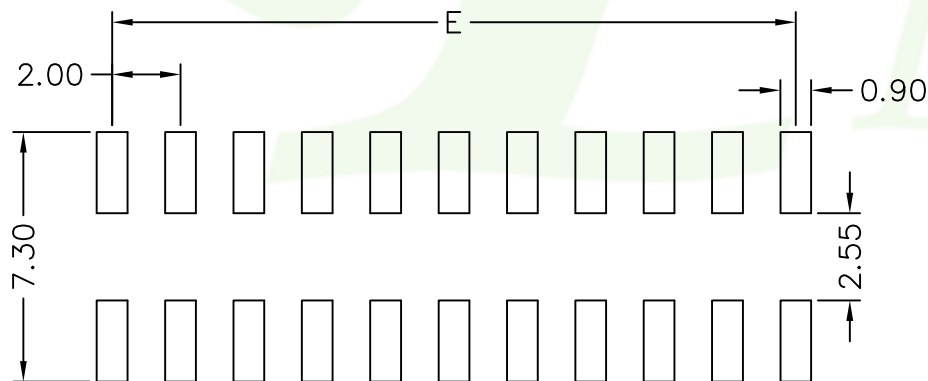
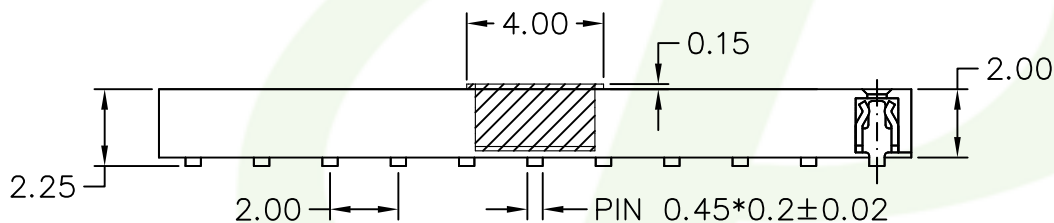


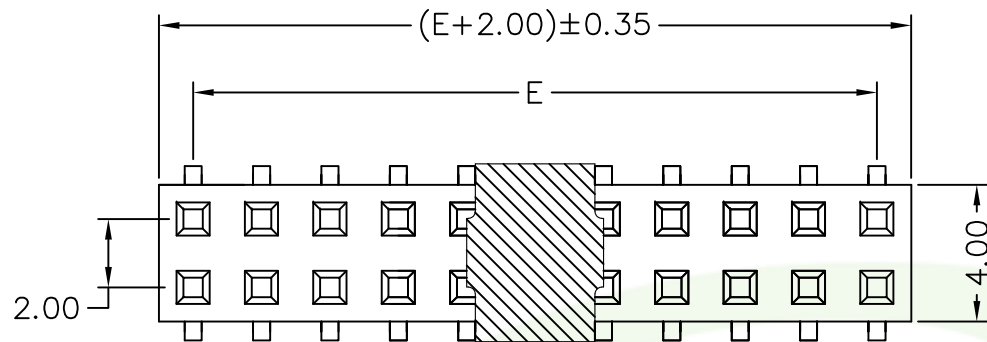


Recommended P.C.B Layout

MATERIAL

Insulator : Thermoplastic High Temp UL94-V0
Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin.
Contact Resistance : 20mΩMax.
Dielectric Voltage : AC 500V for one minute

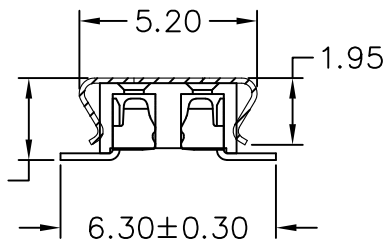

62T-x 2- xx x x xx
1 2 3 4 5 6

- 9: Green Product High Temp
- 1: Single row
2: Dual rows
- No. of contacts per row
- G: Gold flash
S: Selective
T: Tin plated
- B: Black Insulator
- Pinrex internal code.

CAP: 925-20-020044

POLES	DIM E	POLES	DIM E
		21	40.00
2	2.00	22	42.00
3	4.00	23	44.00
4	6.00	24	46.00
5	8.00	25	48.00
6	10.00	26	50.00
7	12.00	27	52.00
8	14.00	28	54.00
9	16.00	29	56.00
10	18.00	30	58.00
11	20.00	31	60.00
12	22.00	32	62.00
13	24.00	33	64.00
14	26.00	34	66.00
15	28.00	35	68.00
16	30.00	36	70.00
17	32.00	37	72.00
18	34.00	38	74.00
19	36.00	39	76.00
20	38.00	40	78.00

TOLERANCE			UNITS : mm		OLD PART NO.		TITLE		P 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
.0	=±.30		SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	
.00	=±.20		NONE	A4	1 OF 1	A	李劍	62T-x2-xxxxxx	DRAW NO. 62T-x2-xxxxxx (網頁專用圖)
.000	=±.XXX								
.0000=±.									
ANG.=±3'									
A	RELEASE	2020/11/05							
REV.	DESCRIPTION	DATE							