
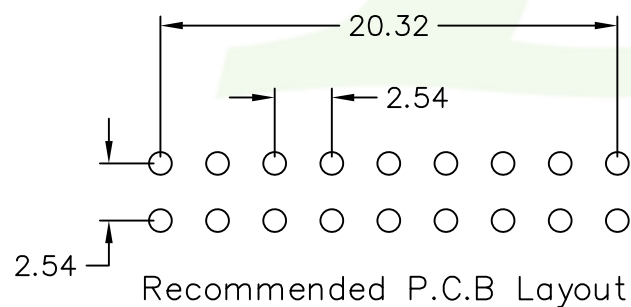
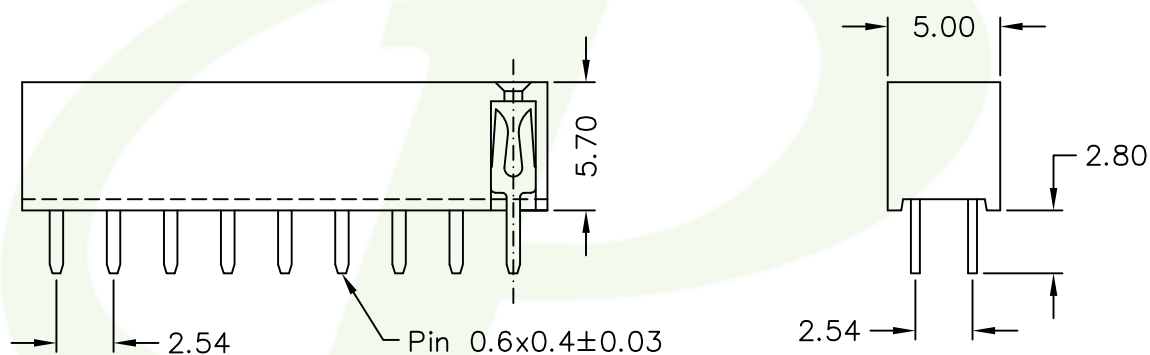


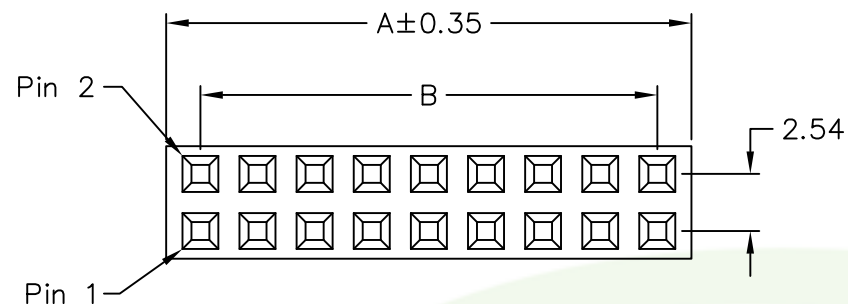

MATERIAL

Insulator: PBT UL94-V0

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

616-x 2- xx x x xx
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- 2: Dual rows
3. No. of contacts per row
4. G: Gold flash
- T: Tin plated
5. B: Black Insulator
6. Pinrex internal code.

文管中心
2020.11.06
發行章

POLES	DIM A	DIM B	POLES	DIM A	DIM B
2	5.08	2.54	17	43.68	40.64
3	7.62	5.08	18	46.22	43.18
4	10.66	7.62	19	48.76	45.72
5	13.20	10.16	20	51.30	48.26
6	15.74	12.70	21	53.84	50.80
7	18.28	15.24	22	56.38	53.34
8	20.82	17.78	23	58.92	55.88
9	23.36	20.32	24	61.46	58.42
10	25.90	22.86	25	64.00	60.96
11	28.44	25.40	26	66.54	63.50
12	30.98	27.94	27	69.08	66.04
13	33.52	30.48	28	71.62	68.58
14	36.06	33.02	29	74.16	71.12
15	38.60	35.56	30	76.70	73.66
16	41.14	38.10			

2*2P & 2*3P 為無肉厚
無肉厚塑膠總長= 2.54*PIN 数

2*4P 以上為有肉厚
有肉厚塑膠總長= 2.54*PIN 数+0.4

P 频锐科技股份有限公司
PINREX TECHNOLOGY CORP.
DRAW NO. 616-x2-xxxxxx(網頁專用圖)

REV.	DESCRIPTION	DATE
A	RELEASE	2020/11/06

TOLERANCE
.0 =±.30
.00 =±.20
.000 =±.XXX
.0000=±.
ANG.=±3'

UNITS : mm
SCALE NONE
SIZE A4

OLD PART NO.
DRAWER 姜文慧
CHECK 李劍
SHEET 1 OF 1
REV. A
APP'D 李劍

TITLE
FEMALE HEADER 2.54*2.54mm
STRAIGHT TYPE, DUAL ROWS
HEIGHT 5.7mm
NEW PART NO. 616-x2-xxxxxx