
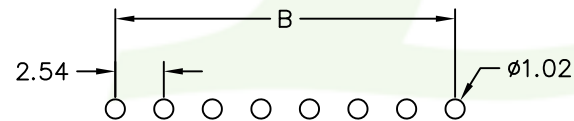
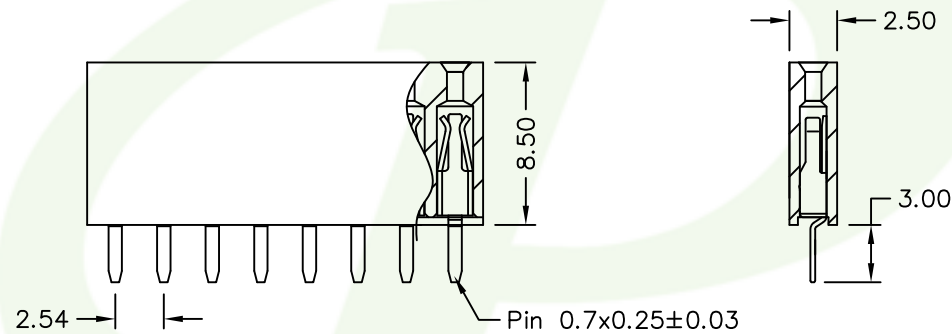


MATERIAL

Insulator : Thermoplastic High Temp UL94-V0
Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin.
Contact Resistance : 20mΩMax.
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

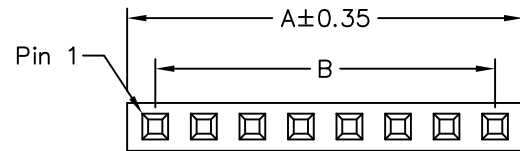

Recommended P.C.B Layout

61W-x 1- xx x x xx
1 2 3 4 5 6

- 5: Normal Parts
7: Green Product
9: Green Product High Temp
- 1: Single row
2: Dual rows
- No. of contacts per row
- G: Gold flash
T: Tin plated
- B: Black Insulator
- Pinrex internal code.

POLES	DIM A	DIM B	POLES	DIM A	DIM B
			21	53.74	50.80
2	5.08	2.54	22	56.28	53.34
3	7.62	5.08	23	58.82	55.88
4	10.56	7.62	24	61.36	58.42
5	13.10	10.16	25	63.90	60.96
6	15.64	12.70	26	66.44	63.50
7	18.18	15.24	27	68.98	66.04
8	20.72	17.78	28	71.52	68.58
9	23.26	20.32	29	74.06	71.12
10	25.80	22.86	30	76.60	73.66
11	28.34	25.40	31	79.14	76.20
12	30.88	27.94	32	81.68	78.74
13	33.42	30.48	33	84.22	81.28
14	35.96	33.02	34	86.76	83.82
15	38.50	35.56	35	89.30	86.36
16	41.04	38.10	36	91.84	88.90
17	43.58	40.64	37	94.38	91.44
18	46.12	43.18	38	96.92	93.98
19	48.66	45.72	39	99.46	96.52
20	51.20	48.26	40	102.0	99.06

文管中心
2020.11.06
發行章

			TOLERANCE				OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.	
			.0 =±.30		UNITS : mm		DRAWER 姜文慧		FEMALE HEADER 2.54*2.54mm STRAIGHT TYPE TRIPLE CONTACT SINGLE ROW,HEIGHT 8.5mm			
			.00 =±.20				CHECK 李剑					
			.000 =±.XXX									
A RELEASE			.0000=±.		SCALE NONE		SHEET 1 OF 1		NEW PART NO.			DRAW NO. 61W-x1-xxxxxx(網頁專用圖)
REV. DESCRIPTION			ANG.=±3'		SIZE A4		REV. A		APP'D 李剑			
									61W-x1-xxxxxx			