


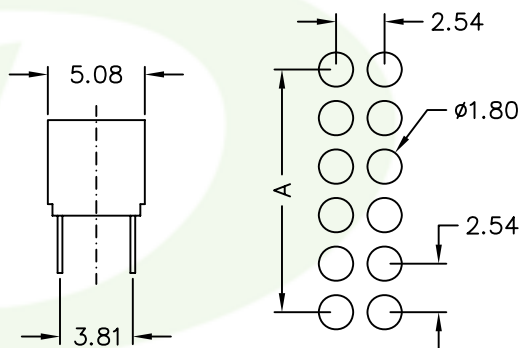
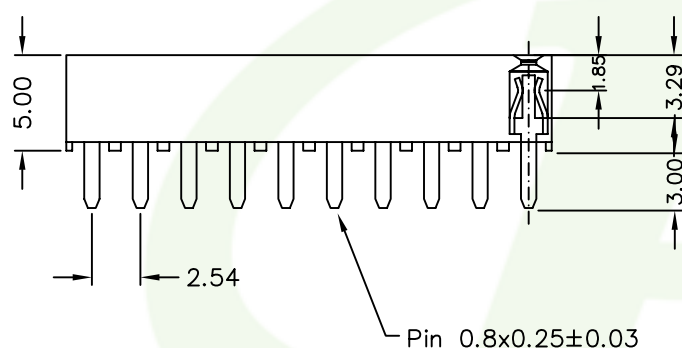


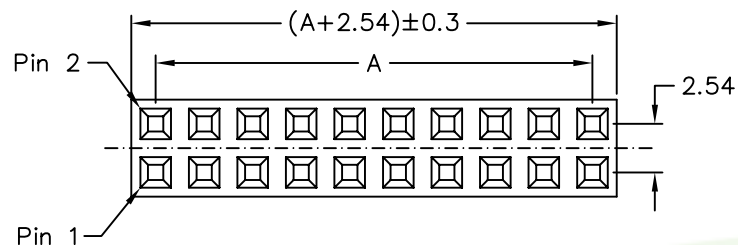

X TYPE

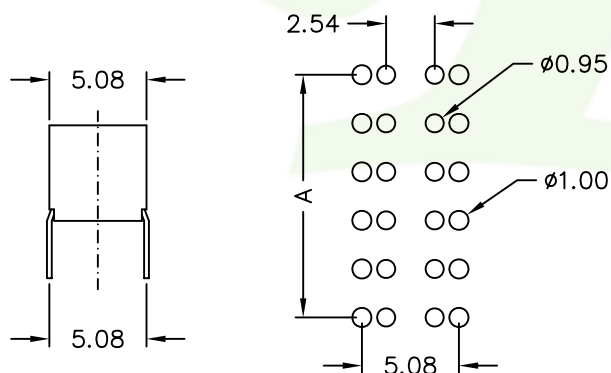

Y TYPE

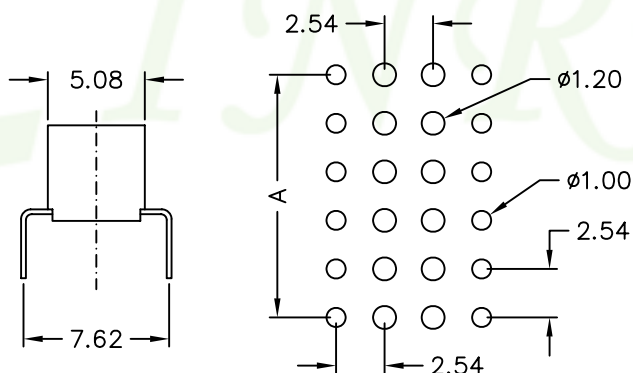

Z TYPE

MATERIAL
Contact Pin : Phosphor Bronze

SPECIFICATION
Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin.
Contact Resistance : 20mΩMax.
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

61C-x 2- xx G B xx
1 2 3 4 5 6


- 5: Normal Parts (30% Glass fiber PBT)
- 7: Green Product (30% Glass fiber PBT)
- 9: Green Product High Temp (NYLON 6T or 9T)
- 1: Single row
- 2: Dual rows
3. No. of contacts per row
4. G: Gold flash
T: Tin plated
S: Selective
5. B: Black Insulator
6. Pinrex internal code.

TYPE	CODE
X	61C-x2-xxGB11
Y	61C-x2-xxGB12
Z	61C-x2-xxGB13

POLES	DIM A	POLES	DIM A
		21	50.80
2	2.54	22	53.34
3	5.08	23	55.88
4	7.62	24	58.42
5	10.16	25	60.96
6	12.70	26	63.50
7	15.24	27	66.04
8	17.78	28	68.58
9	20.32	29	71.12
10	22.86	30	73.66
11	25.40	31	76.20
12	27.94	32	78.74
13	30.48	33	81.28
14	33.02	34	83.82
15	35.56	35	86.36
16	38.10	36	88.90
17	40.64	37	91.44
18	43.18	38	93.98
19	45.72	39	96.52
20	48.26	40	99.06



TOLERANCE
.0 =±.30
.00 =±.20
.000 =±.XXX
.0000=±.
ANG.=±3'



UNITS : mm

SCALE NONE SIZE A4

OLD PART NO.
PS1C50-2xxGB

DRAWER
Kent

SHEET 1 OF 1 REV. A

TITLE
FEMALE HEADER 2.54*2.54mm
DUAL ENTRY TYPE, DUAL ROWS
HEIGHT 5.0 mm

NEW PART NO.
61C-x2-xxGBxx



頻銳科技股份有限公司
PINREX TECHNOLOGY CORP.

DRAW NO.
61C-x2-xxGBxx

REV.	DESCRIPTION	DATE
A	RELEASE	2005/04/01