
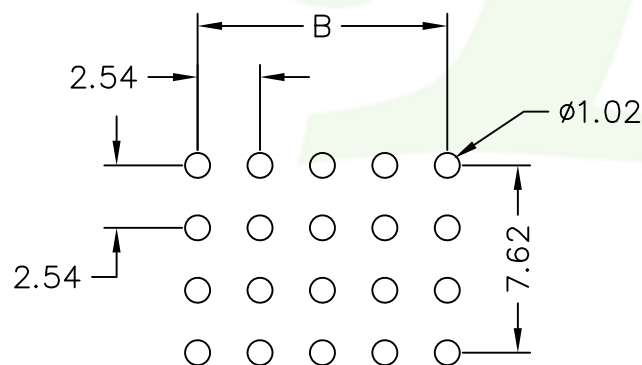
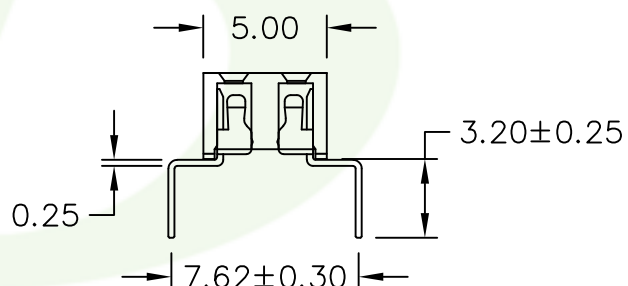
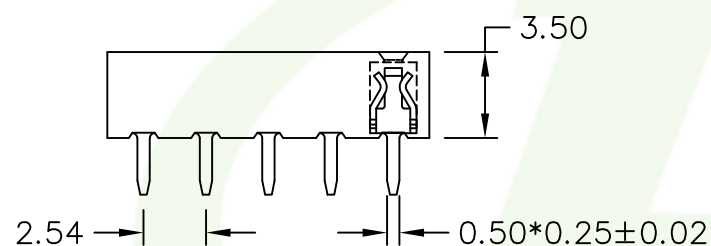


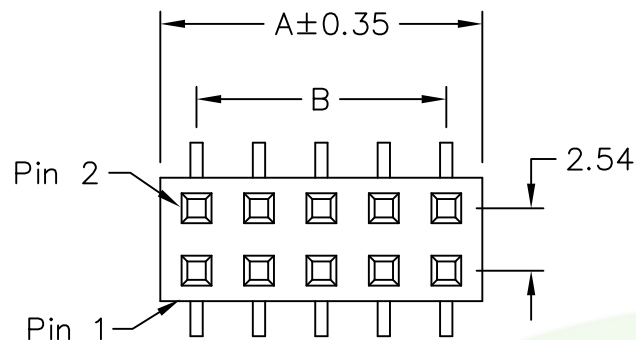

Recommended P.C.B Layout

Technical Data

Material:

Contact Material: Phosphor Bronze

Insulator Material: Black Polyester

Electrical:

Current rating: 3.0Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000mΩ at V=100V

Withstanding Voltage: 1000V AC/minute

Insulator : Thermoplastic High Temp UL94-V0

61I -x 2- xx x x xx
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- 2: Dual rows
- No. of contacts per row
- G: Gold flash
- T: Tin plated
- B: Black Insulator
- Pinrex internal code.

POLES	DIM A	DIM B	POLES	DIM A	DIM B
			21	53.74	50.80
2	5.08	2.54	22	56.28	53.34
3	7.62	5.08	23	58.82	55.88
4	10.56	7.62	24	61.36	58.42
5	13.10	10.16	25	63.90	60.96
6	15.64	12.70	26	66.44	63.50
7	18.18	15.24	27	68.98	66.04
8	20.72	17.78	28	71.52	68.58
9	23.26	20.32	29	74.06	71.12
10	25.80	22.86	30	76.60	73.66
11	28.34	25.40	31	79.14	76.20
12	30.88	27.94	32	81.68	78.74
13	33.42	30.48	33	84.22	81.28
14	35.96	33.02	34	86.76	83.82
15	38.50	35.56	35	89.30	86.36
16	41.04	38.10	36	91.84	88.90
17	43.58	40.64	37	94.38	91.44
18	46.12	43.18	38	96.92	93.98
19	48.66	45.72	39	99.46	96.52
20	51.20	48.26	40	102.00	99.06

文管中心
2020.11.06
發行章

REV.	DESCRIPTION	DATE
A	RELEASE	2020/11/05

TOLERANCE
.0 =±.30
.00 =±.20
.000 =±.XXX
.0000=±.
ANG.=±3°

UNITS : mm
SCALE NONE
SIZE A4

OLD PART NO.	DRAWER	CHECK
	姜文慧	李劍
SHEET	REV.	APP'D
1 OF 1	A	李劍

TITLE
Pitch 2.54 H3.55mm Dual Row U Type Female Header TUBE
NEW PART NO.
61I -x2-xxxxxx

DRAW NO.
61I -x2-xxxxxx(網頁專用圖)