
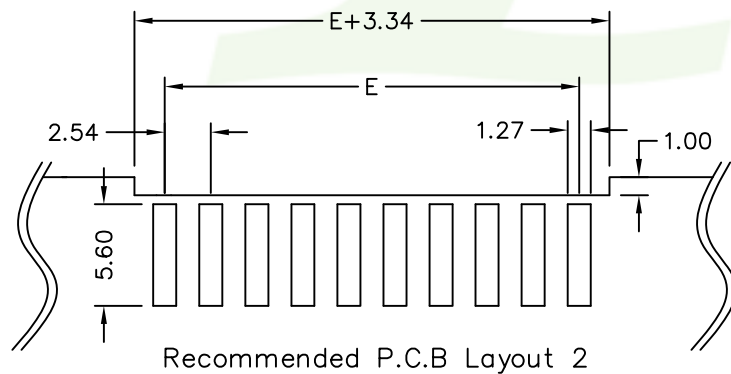
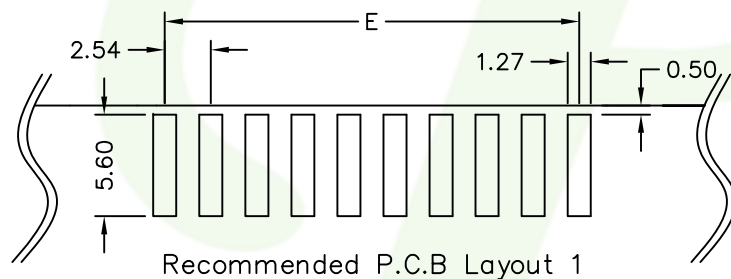


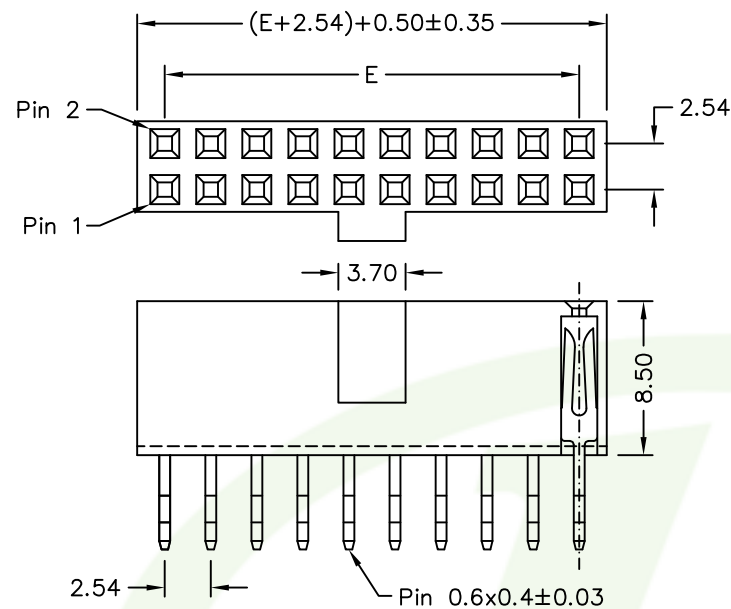

MATERIAL

Insulator : Thermoplastic High Temp UL94-V0
Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin.
Contact Resistance : 20mΩMax.
Dielectric Voltage : AC 500V for one minute

61K-x $\frac{2}{1}$ - $\frac{xx}{2}$ $\frac{x}{3}$ $\frac{x}{4}$ $\frac{xx}{5}$

- 1: Single row
2: Dual rows
- No. of contacts per row
- G: Gold flash
T: Tin plated
- B: Black Insulator
W: White Insulator
- Pinrex internal code.
With Bump

POLES	DIM E	POLES	DIM E
		21	50.80
2	2.54	22	53.34
3	5.08	23	55.88
4	7.62	24	58.42
5	10.16	25	60.96
6	12.70	26	63.50
7	15.24	27	66.04
8	17.78	28	68.58
9	20.32	29	71.12
10	22.86	30	73.66
11	25.40	31	76.20
12	27.94	32	78.74
13	30.48	33	81.28
14	33.02	34	83.82
15	35.56	35	86.36
16	38.10	36	88.90
17	40.64	37	91.44
18	43.18	38	93.98
19	45.72	39	96.52
20	48.26	40	99.06



TOLERANCE			UNITS : mm		OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
REV.	DESCRIPTION	DATE	SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	
A	RELEASE	2020/11/05	NONE	A4	1 OF 1	A	李劍	61K-x2-xxxxxx	61K-x2-xxxxxx(網頁專用圖)