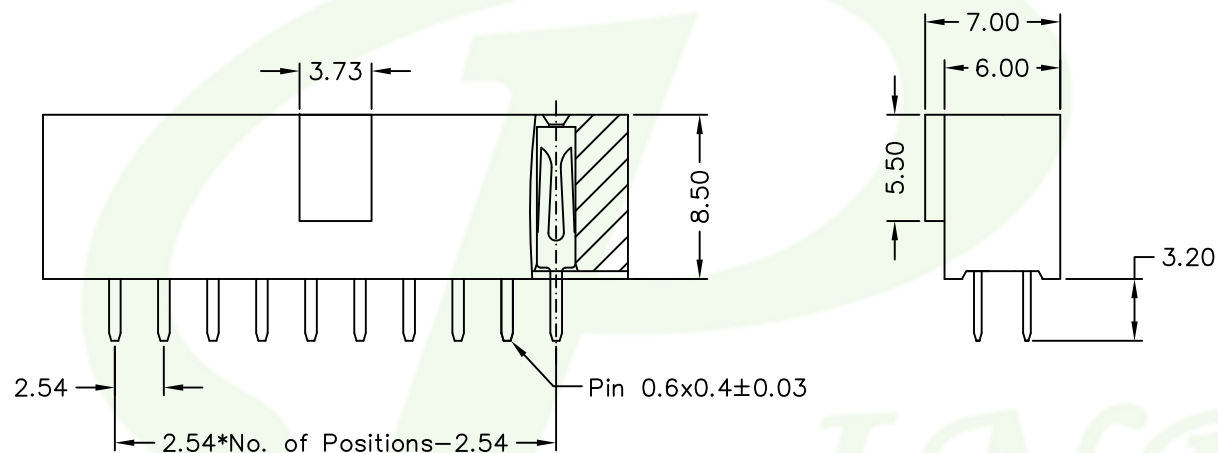
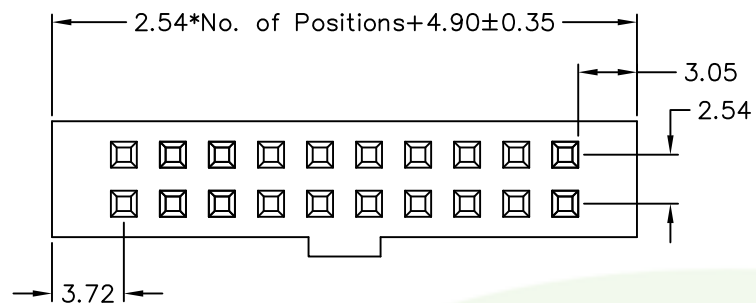


MATERIAL

Contact Pin : Brass

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

Operating Temperature: -40°C to +105°C

61M-x $\frac{2}{1}$ - $\frac{xx}{3}$ x $\frac{x}{4}$ x $\frac{40}{5}$ $\frac{6}{6}$

1. 7: Green Product
9: Green Product High Temp
2. 1: Single row
2: Dual rows
3. No. of contacts per row
4. G: Gold flash
S: Selective
T: Tin plated
5. B: Black Insulator
6. Pinrex internal code.



			TOLERANCE		OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0 = ±.30		UNITS : mm		FEMALE HEADER 2.54*2.54mm		
			.00 = ±.20		SCALE NONE	DRAWER 麦文慧	STRAIGHT TYPE, DUAL ROWS		
			.000 = ±.XXX		SIZE A4	CHECK 李剑	HEIGHT 8.5mm		
A	RELEASE	2020/11/05	.0000 = ±.		SHEET 1 OF 1	APP'D 李剑	NEW PART NO. 61M-x2-xxxxxx		DRAW NO. 61M-x2-xxxx40(網頁專用圖)
REV.	DESCRIPTION	DATE	ANG.=±3'						