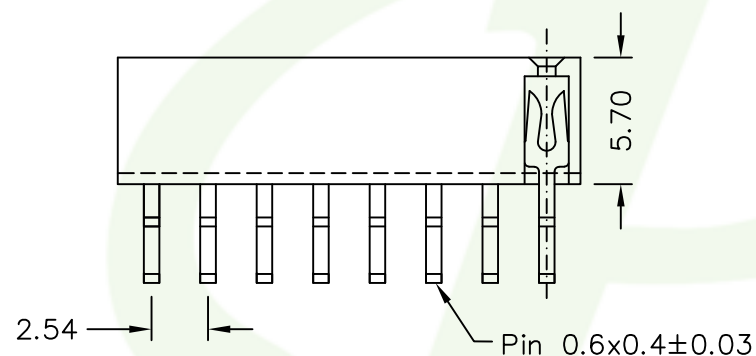
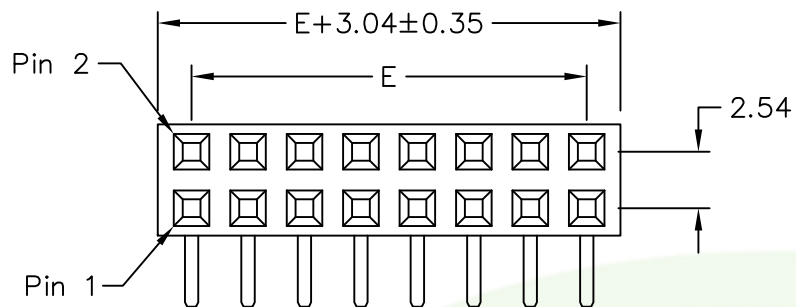


Recommended P.C.B Layout

MATERIAL

Insulator : PBT UL94-V0

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

617-x 2- xx x x xx
1 2 3 4 5 6

- 7: Green Product
9: Green Product High Temp
- 1: Single row
2: Dual rows
- No. of contacts per row
- G: Gold flash
T: Tin plated
- B: Black Insulator
W: White Insulator
- Pinrex internal code.

POLES	DIM E	POLES	DIM E
		21	50.80
		22	53.34
3	5.08	23	55.88
4	7.62	24	58.42
5	10.16	25	60.96
6	12.70	26	63.50
7	15.24	27	66.04
8	17.78	28	68.58
9	20.32	29	71.12
10	22.86	30	73.66
11	25.40	31	76.20
12	27.94	32	78.74
13	30.48	33	81.28
14	33.02	34	83.82
15	35.56	35	86.36
16	38.10	36	88.90
17	40.64	37	91.44
18	43.18	38	93.98
19	45.72	39	96.52
20	48.26	40	99.06



			TOLERANCE				OLD PART NO.		TITLE		 频锐科技股份有限公司 PINREX ENTERPRISE CO., LTD
			.0 =±.30		UNITS : mm		DRAWER 姜文慧		FEMALE HEADER 2.54*2.54mm		
			.00 =±.20				CHECK 李剑		RIGHT ANGLE TYPE, DUAL ROWS		
			.000 =±.XXX						HEIGHT 5.7mm		
A RELEASE			.0000=±.		SCALE NONE		SHEET 1 OF 1		NEW PART NO.		
REV. DESCRIPTION			ANG.=±3'		SIZE A4		REV. A		617-x2-xxxxxx		
			DATE 2020/11/09				APP'D 李剑		DRAW NO.		
									617-x2-xxxxxx(網業專用圖)		