
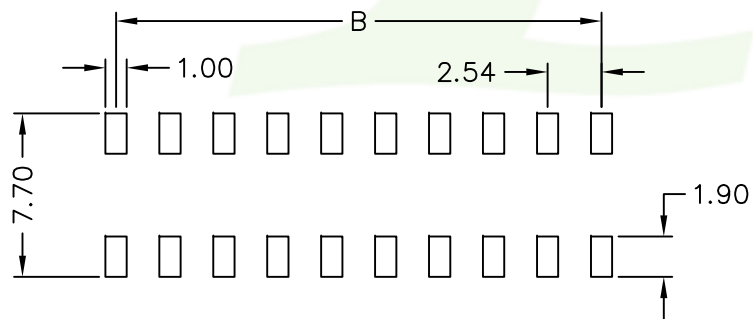
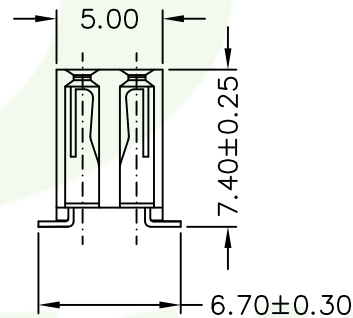
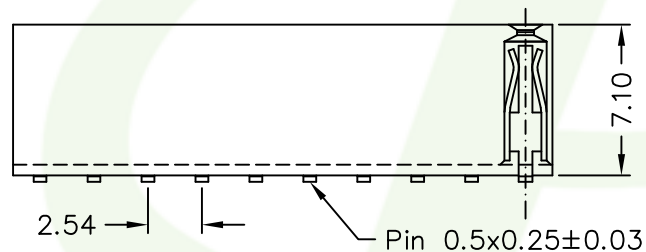


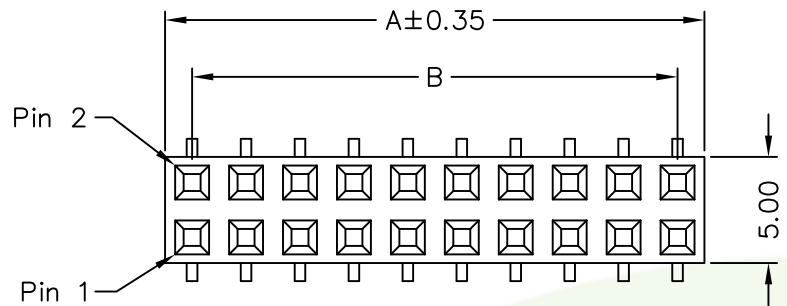

Recommended P.C.B Layout

## MATERIAL

Insulator : Thermoplastic High Temp UL94-V0

Contact Pin : Phosphor Bronze

## SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500Vfor one minute

Operation Temperature : -40°C to + 105°C

615-x 2- xx x x xx  
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- 2: Dual rows
- No. of contacts per row
- G: Gold flash
- T: Tin plated
- B: Black Insulator
- Pinrex internal code.

文管中心  
2020.11.06  
發行章

| POLES | DIM A | DIM B | POLES | DIM A | DIM B | POLES | DIM A  | DIM B |
|-------|-------|-------|-------|-------|-------|-------|--------|-------|
|       |       |       | 15    | 38.10 | 35.56 | 29    | 73.66  | 71.12 |
| 2     | 5.08  | 2.54  | 16    | 40.64 | 38.10 | 30    | 76.20  | 73.66 |
| 3     | 7.62  | 5.08  | 17    | 43.18 | 40.64 | 31    | 78.74  | 76.20 |
| 4     | 10.16 | 7.62  | 18    | 45.72 | 43.18 | 32    | 81.28  | 78.74 |
| 5     | 12.70 | 10.16 | 19    | 48.26 | 45.72 | 33    | 83.82  | 81.28 |
| 6     | 15.24 | 12.70 | 20    | 50.80 | 48.26 | 34    | 86.36  | 83.82 |
| 7     | 17.78 | 15.24 | 21    | 53.34 | 50.80 | 35    | 88.90  | 86.36 |
| 8     | 20.32 | 17.78 | 22    | 55.88 | 53.34 | 36    | 91.44  | 88.90 |
| 9     | 22.86 | 20.32 | 23    | 58.42 | 55.88 | 37    | 93.98  | 91.44 |
| 10    | 25.40 | 22.86 | 24    | 60.96 | 58.42 | 38    | 96.52  | 93.98 |
| 11    | 27.94 | 25.40 | 25    | 63.50 | 60.96 | 39    | 99.06  | 96.52 |
| 12    | 30.48 | 27.94 | 26    | 66.04 | 63.50 | 40    | 101.60 | 99.06 |
| 13    | 33.02 | 30.48 | 27    | 68.58 | 66.04 |       |        |       |
| 14    | 35.56 | 33.02 | 28    | 71.12 | 68.58 |       |        |       |

| REV. | DESCRIPTION | DATE       |
|------|-------------|------------|
| A    | RELEASE     | 2020/11/06 |

| TOLERANCE   |
|-------------|
| .0 =±.30    |
| .00 =±.20   |
| .000 =±.XXX |
| .0000=±.    |
| ANG.=±3'    |

|            |
|------------|
| UNITS : mm |
| SCALE NONE |
| SIZE A4    |

| OLD PART NO. | DRAWER | CHECK |
|--------------|--------|-------|
|              | 麦文慧    | 李劍    |
| SHEET        | REV.   | APP'D |
| 1 OF 1       | A      | 李劍    |

| TITLE                                                            | NEW PART NO.  |
|------------------------------------------------------------------|---------------|
| FEMALE HEADER 2.54*2.54mm<br>SMT TYPE, DUAL ROWS<br>HEIGHT 7.1mm | 615-x2-xxxxxx |

| DRAW NO.             |
|----------------------|
| 615-x2-xxxxxx(網頁專用圖) |