
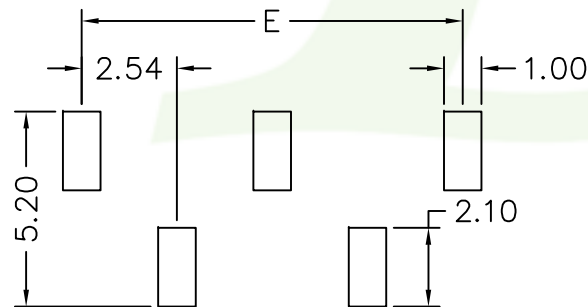
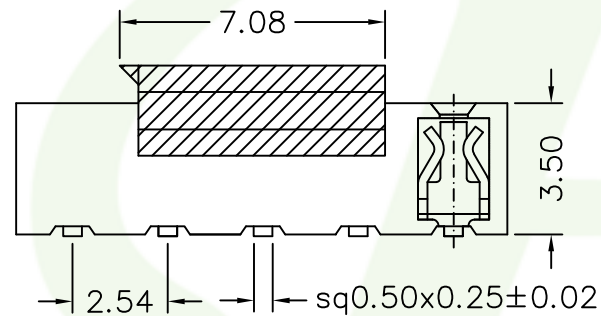


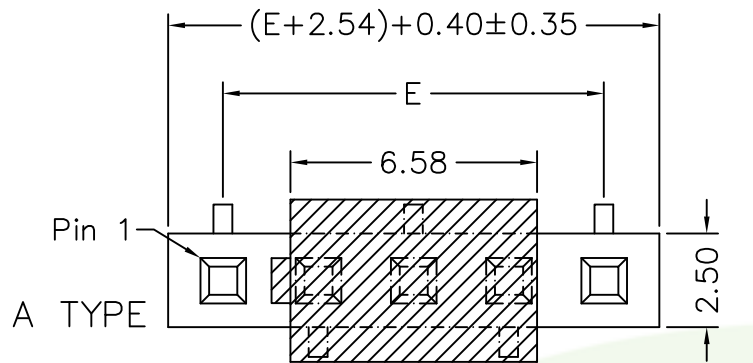

A TYPE
Recommended P.C.B Layout

MATERIAL

Insulator : Thermoplastic High Temp UL94-V0

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

Operating Temperature: -40°C to +105°C

61G-x 1- xx x x xx
1 2 3 4 5 6

- 7: Green Product
9: Green Product High Temp
- 1: Single row
2: Dual rows
- No. of contacts per row
- G: Gold flash
B: Black Insulator
- Pinrex internal code.
CAP: 925-50-021068

POLES	DIM E
2	2.54
3	5.08
4	7.62
5	10.16
6	12.70
7	15.24
8	17.78
9	20.32
10	22.86
11	25.40
12	27.94
13	30.48
14	33.02
15	35.56
16	38.10
17	40.64
18	43.18
19	45.72
20	48.26

文管中心
2020.11.06
發行章

					TOLERANCE				OLD PART NO.			TITLE FEMALE HEADER 2.54*2.54mm SMT TYPE,SINGLE ROW HEIGHT 3.5mm CAP+T/R			 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.							
					.0 =±.30 .00 =±.20 .000 =±.XXX .0000=±. ANG.=±3'		UNITS : mm		DRAWER 姜文慧		CHECK 李劍											
A RELEASE			2020/11/05				SCALE NONE		SIZE A4		SHEET 1 OF 1		REV. A		APP'D 李劍		NEW PART NO. 61G-x1-xxxxxx			DRAW NO. 61G-x1-xxxxxx(網頁專用圖)		
REV. DESCRIPTION			DATE																			