
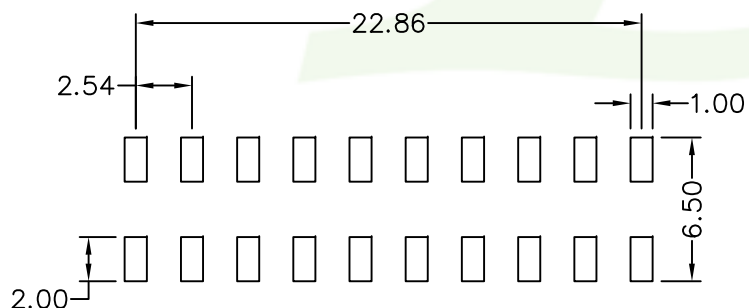
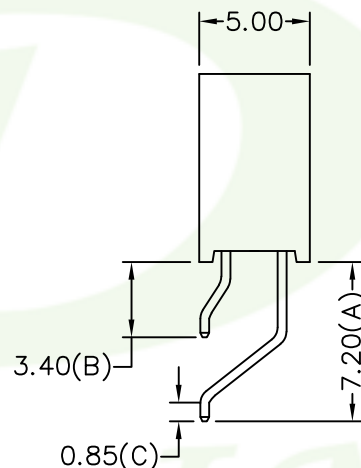
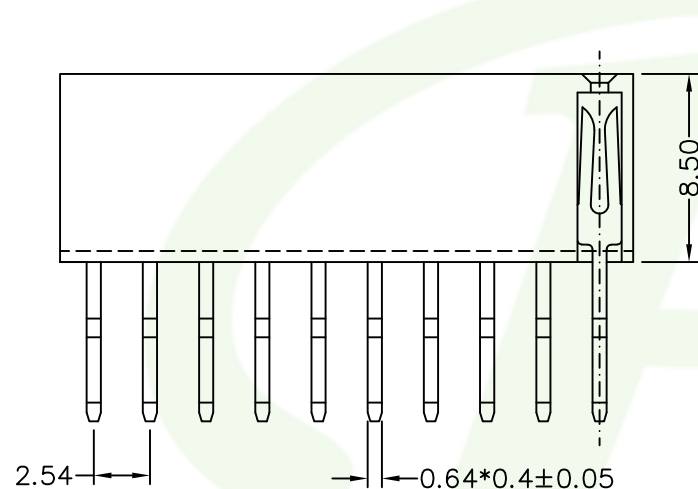


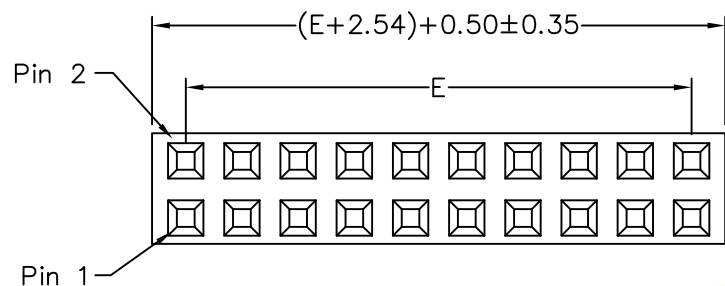

Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphor Bronze

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

614-x 2- xx x x xx
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- 2: Dual rows
- 3: Triple rows
- No. of contacts per row
- G: Gold flash
- S: Selective
- T: Tin plated
- B: Black Insulator
- W: White Insulator
- Pinrex internal code.

POLES	DIM E	POLES	DIM E
		21	50.80
2	2.54	22	53.34
3	5.08	23	55.88
4	7.62	24	58.42
5	10.16	25	60.96
6	12.70	26	63.50
7	15.24	27	66.04
8	17.78	28	68.58
9	20.32	29	71.12
10	22.86	30	73.66
11	25.40	31	76.20
12	27.94	32	78.74
13	30.48	33	81.28
14	33.02	34	83.82
15	35.56	35	86.36
16	38.10	36	88.90
17	40.64	37	91.44
18	43.18	38	93.98
19	45.72	39	96.52
20	48.26	40	99.06

文管中心
2020.11.06
發行章

REV.	DESCRIPTION	DATE
A	RELEASE	2020/11/06

TOLERANCE
.0 =±.30
.00 =±.20
.000 =±.XXX
.0000=±.
ANG.=±3'

UNITS : mm
SCALE NONE
SIZE A4

OLD PART NO.	DRAWER	CHECK
	麦文慧	李剑
SHEET	REV.	APP'D
1 OF 1	A	李剑

TITLE
FEMALE HEADER 2.54*2.54mm HORIZONTAL PIN, DUAL ROWS HEIGHT 8.5mm Tube
NEW PART NO.
614-x2-xxxxxx

DRAW NO.
614-x2-xxxxxx(網頁專用圖)