
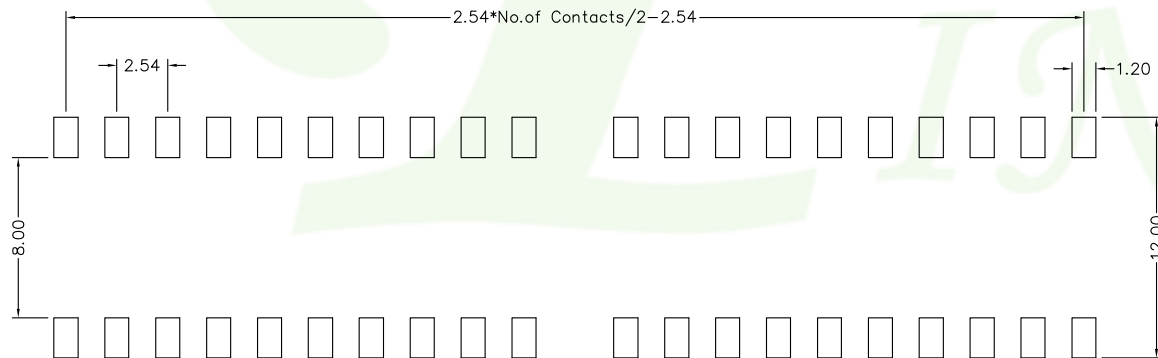
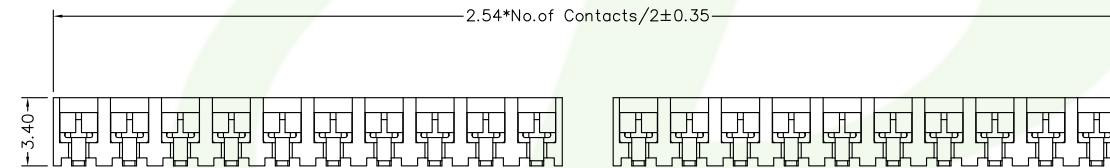


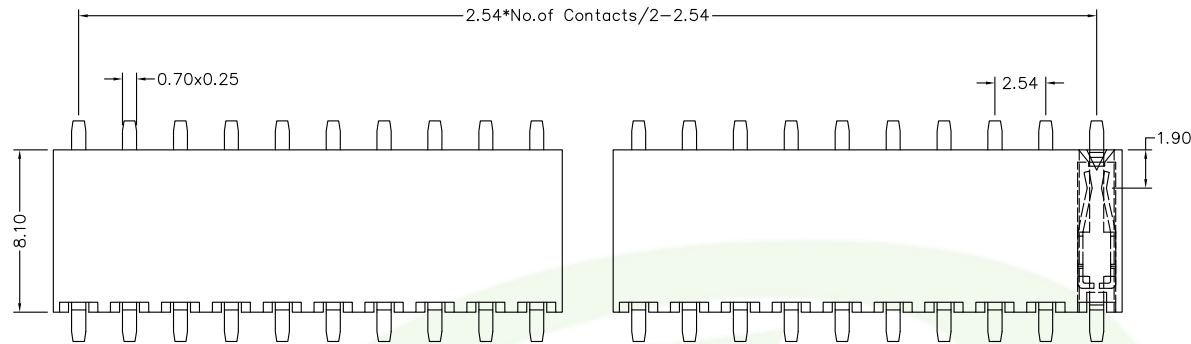

Recommended P.C.B Layout

MATERIAL

Insulator : Thermoplastic High Temp UL94-V0

Contact Pin : Phosphor Bronze

SPECIFICATION


Current Rating : 3 Amps

Insulation Resistance : 5000Megohms min.

Contact Resistance : 20m ohms max

Dielectric Withstanding;1000 V AC

61P-x 1- xx x x xx
1 2 3 4 5 6

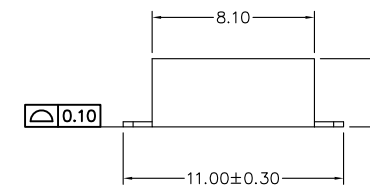

- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- 2: Dual rows
- No. of contacts per row
- G: Gold flash
- S: Selective
- T: Tin plated
- B: Black Insulator
- W: White Insulator
- Pinrex internal code.



			TOLERANCE .0 =±.30 .00 =±.20 .000 =±.XXX .0000=±. ANG.=±3°	 UNITS : mm	OLD PART NO.			TITLE FEMALE HEADER 2.54mm SIDE ENTRY, SMT TYPE SINGLE ROW	 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.		
					DRAWER 麦文慧	CHECK 李剑					
A	RELEASE	2020/11/05			SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李剑	NEW PART NO. 61P-x1-xxxxxx	DRAW NO. 61P-x1-xxxxxx (網頁專用圖)
REV.	DESCRIPTION	DATE									