
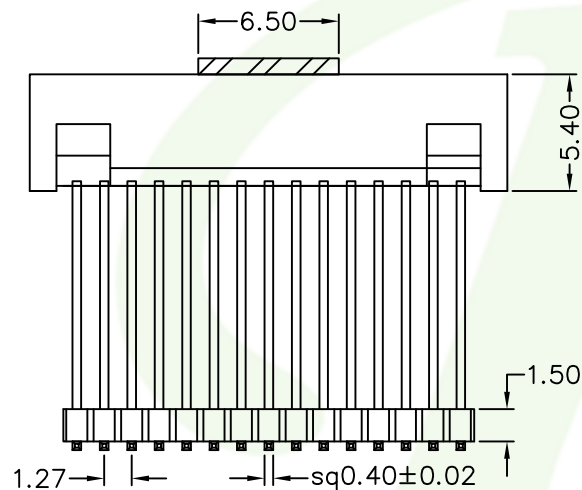
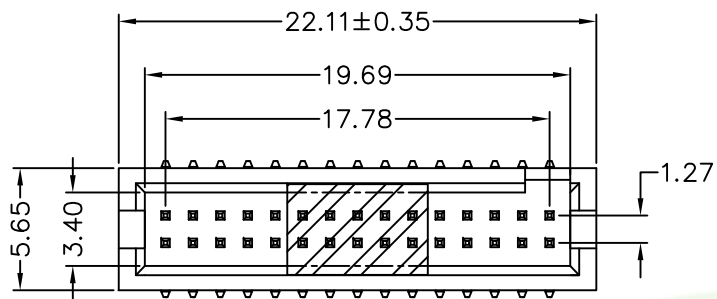


Recommended P.C.B Layout

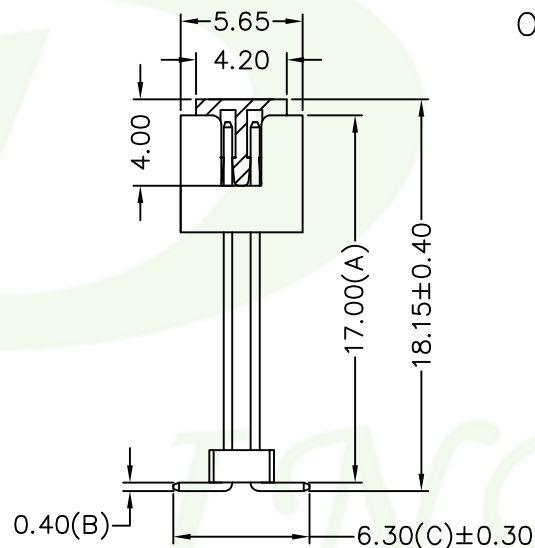

MATERIAL

Insulator : Thermoplastic High Temp UL94-V0
Contact: Brass

SPECIFICATION

Current Rate : 3A/per pin 28AWG
Insulation Resistance : 5000MΩMin
Contact Resistance : 20mΩMax
Withstand voltage : 500V AC Min
Operating Temperature : -40°C to +105°C

538-x 0- xx x x xx
1 2 3 4 5

1. 7: Green Product
9: Green Product High Temp
2. No. of contacts
3. G: Gold flash
T: Tin plated
4. B: Black Insulator
5. Pinrex internal code.



			TOLERANCE		UNITS : mm		OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0	=±.40					BOX HEADER 1.27 H=5.65 +		
			.00	=±.25			DRAWER	CHECK	PIN HEADER 1.27 H=2.5 SMT TYPE		
			.000	=±.XXX			姜文慧	李劍	CAP+T/R		
A	RELEASE	2020/11/09	.0000=±.		SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
REV.	DESCRIPTION	DATE	ANG.=±3'		NONE	A4	1 OF 1	A	李劍	538-x0-xxxxxx	538-x0-xxxxxx(網頁專用圖)