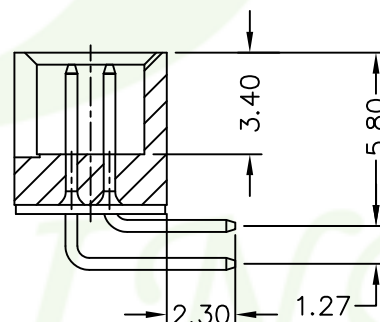
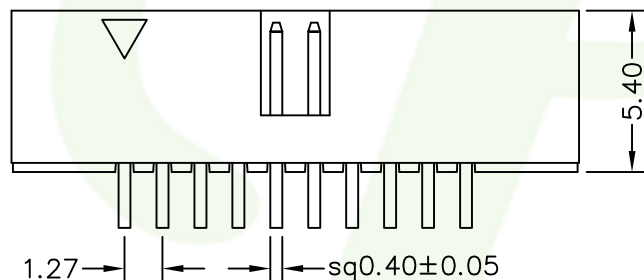
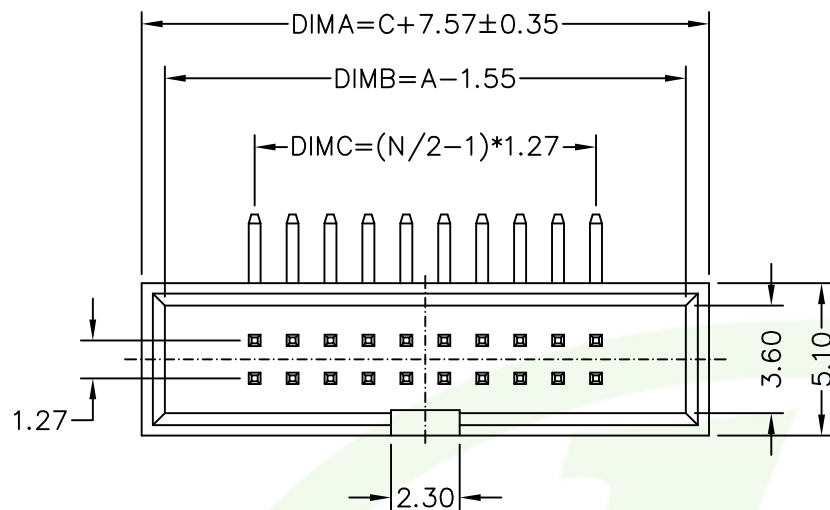


Recommended P.C.B Layout

MATERIAL

Insulator : Thermoplastic High Temp UL94-V0
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 10mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C
Max Processing Temp : 230° for 30"

53B-x 0- xx x x xx
1 2 3 4 5

1. 7: Green Product
- 9: Green Product High Temp
2. No. of contacts
3. G: Gold flash
- T: Tin plated
4. B: Black Insulator
5. Pinrex internal code.

DIM	A	B	C
N 公式	C+7.57	A-1.55	[(N/2)-1]*1.27
06P	10.11	8.56	2.54
10P	12.65	11.10	5.08
12P	13.92	12.37	6.35
14P	15.19	13.64	7.62
16P	16.46	14.91	8.89
20P	19.00	17.45	11.43
24P	21.54	19.99	13.97
26P	22.81	21.26	15.24
28P	24.08	22.53	16.51
30P	25.35	23.80	17.78
34P	27.89	26.34	20.32
40P	31.70	30.15	24.13
44P	34.24	32.69	26.67
50P	38.05	36.50	30.48
60P	44.40	42.85	36.83
64P	46.94	45.39	39.37
68P	49.48	47.93	41.91
80P	57.10	55.55	49.53
100P	69.80	68.25	62.23