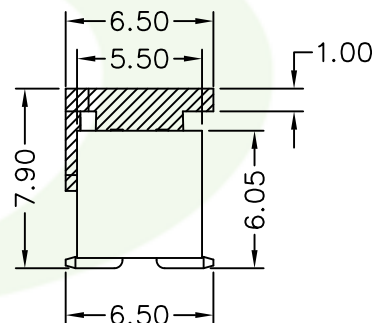
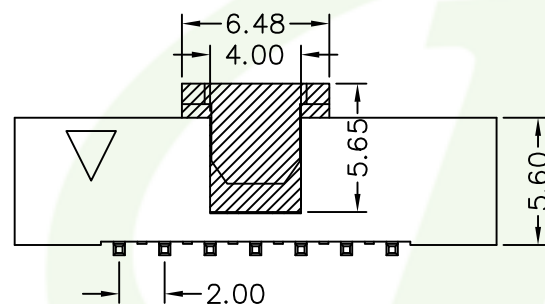
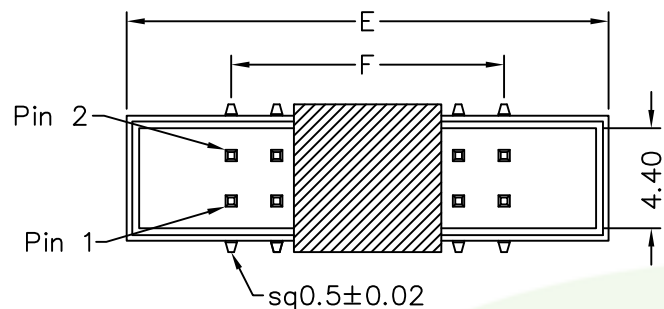


Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

522-x 0- xx x x xx
1 2 3 4 5

1. 7: Green Product
- 9: Green Product High Temp
2. No. of contacts
3. G: Gold flash
- S: Selective
4. B: Black Insulator
5. Pinrex internal code.

POLES	DIM E	DIM F
8	15.20	6.00
10	17.20	8.00
12	19.20	10.00
14	21.20	12.00
16	23.20	14.00
20	27.20	18.00
24	31.20	22.00
26	33.20	24.00
30	37.20	28.00
32	39.20	30.00
34	41.20	32.00
40	47.20	38.00
44	51.20	42.00
50	57.20	48.00
60	67.20	58.00
64	71.20	62.00
68	75.20	66.00



			TOLERANCE		 UNITS : mm		OLD PART NO.			TITLE BOX HEADER 2.0*2.0mm, SMT TYPE,TAPE REEL CAP+TAPE REEL		 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.	
			.0 =±.30				DRAWER		CHECK 李剑				
			.00 =±.20				麦文慧						
			.000 =±.XXX										
A	RELEASE	2020/11/09	.0000=±.		SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.		
REV.	DESCRIPTION	DATE	ANG.=±3'		NONE	A4	1 OF 1	A	李剑	522-x0-xxxxxx	522-x0-xxxxxx(網頁專用圖)		