

MATERIAL

Contact Pin : Brass

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute





52T-x 0- $\frac{xx}{1} \frac{x}{2} \frac{x}{3} \frac{xx}{4} \frac{xx}{5}$

- 7: Green Product
- 9: Green Product High Temp
- No. of contacts
- G: Gold flash
- T: Tin plated
- H: 15u" Gold plated
- B: Black Insulator
- Pinrex internal code.


14pin以下無窗口

14pin以上有窗口(含14P)

POLES	DIM A	DIM B	DIM C
8	10.65	8.85	6.00
10	12.65	10.85	8.00
12	14.65	12.85	10.00
14	16.65	14.85	12.00
16	18.65	16.85	14.00
18	20.65	18.85	16.00
20	22.65	20.85	18.00
24	26.65	24.85	22.00
26	28.65	26.85	24.00
28	30.65	28.85	26.00
34	36.65	34.85	32.00
40	42.65	40.85	38.00
44	46.65	44.85	42.00

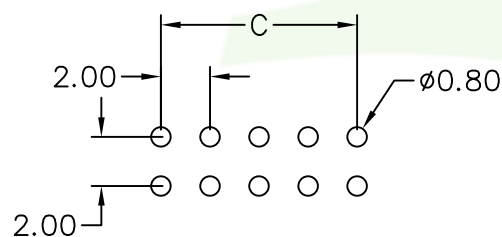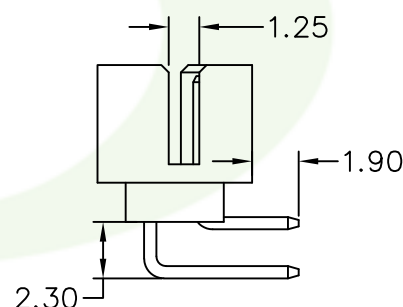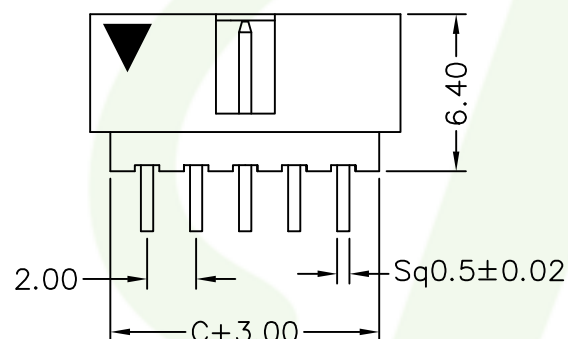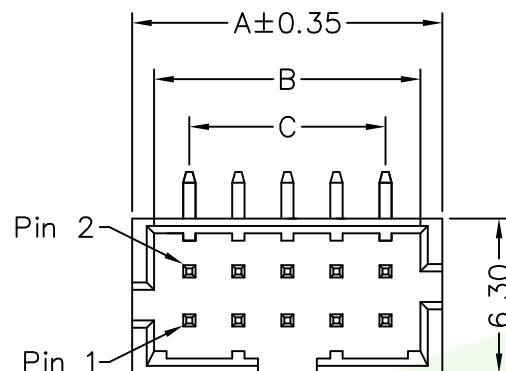


Recommended P.C.B Layout

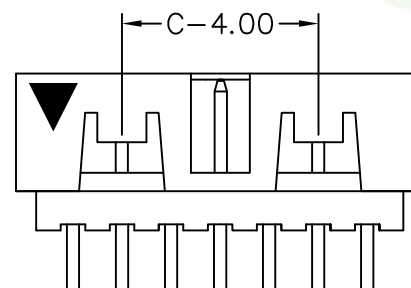

TOLERANCE

.0 =±.50
.00 =±.30
.000 =±.XXX
.0000=±.
ANG.=±3'



UNITS : mm

SCALE NONE SIZE A4

OLD PART NO.

DRAWER 麦文慧

SHEET 1 OF 1

REV. C

CHECK 李剑

APP'D 李剑

TITLE

BOX HEADER 2.0*2.0mm,
R/A

NEW PART NO.

52T-x0-xxxxxx



频锐科技股份有限公司
PINREX TECHNOLOGY CORP.

DRAW NO.

52T-x0-xxxxxx(網頁專用圖)

REV.	DESCRIPTION	DATE
A	RELEASE	2020/11/09