


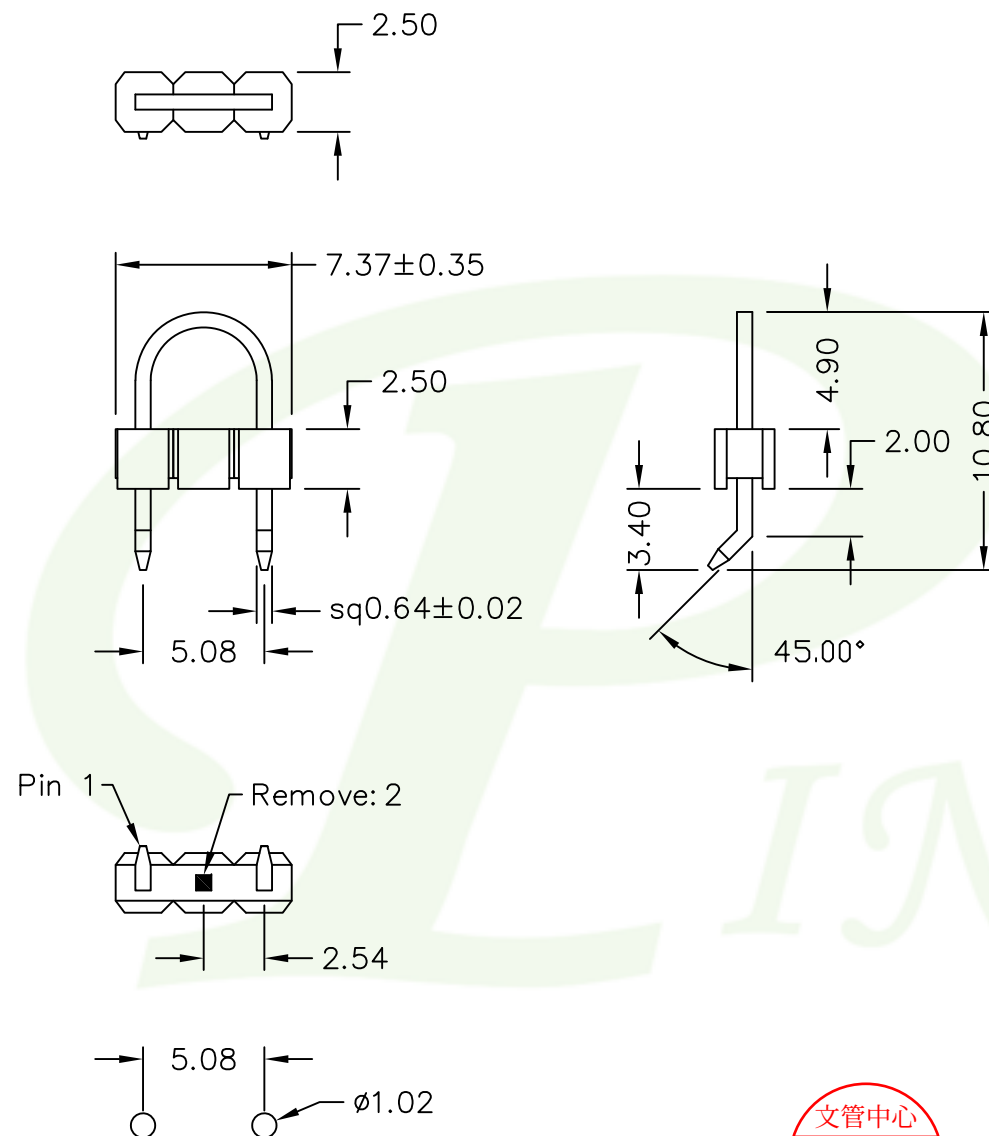

Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

Insulator: NY6T UL94-V0

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to +105°C

21U-x 1- xx x x 08
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- No. of contacts per row
- G: Gold flash
- S: Selective
- T: Tin plated
- B: Black Insulator
- Pinrex internal code.



			TOLERANCE		UNITS : mm	OLD PART NO.		TITLE	 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.
REV.	DESCRIPTION	DATE	.0	=±.30		DRAWER	CHECK		
A	RELEASE	2020/03/31	.00	=±.20	SCALE NONE	袁丽娜	李剑	PIN HEADER 2.54*2.54mm STRAIGHT TYPE, SINGLE ROW U TERMINAL	21u-x1-xxxx08(網頁專用圖)
			.000	=±.XXX	SIZE A4	SHEET 1 OF 1	APP'D 李剑	NEW PART NO. 21u-x1-xxxx08	
			.0000=±.			REV. A			
			ANG.=±3'						