



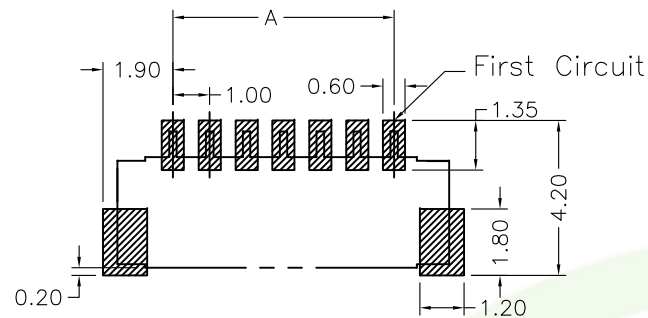


RECOMMEND PCB LAYOUT


General tolerance ± 0.05

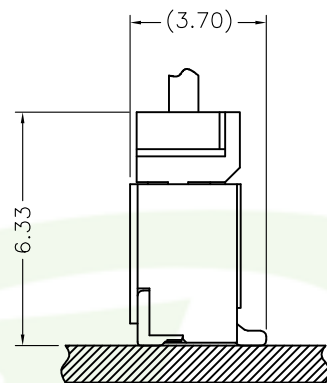



ASSEMBLED ALL PART VIEW




3D VIEW

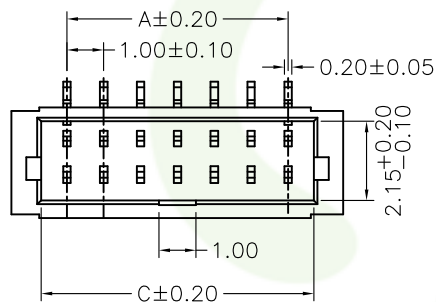

ASSEMBLED CAP VIEW

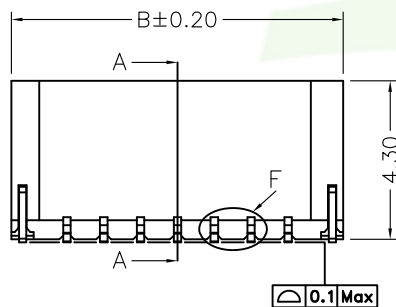

DETAIL F(SCALE2:1)

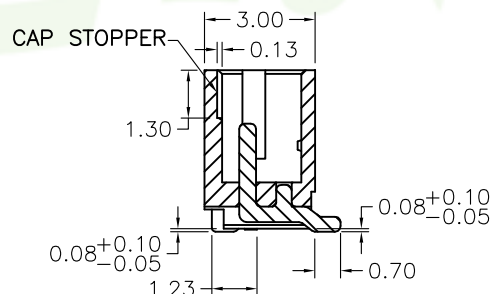

SECTION A-A

SPECIFICATION

Current Rating : 1A AC/DC

Perating Voltage : 50V AC/DC

Contact Resistance : 20m Ω Max

Dielectric voltage : 500V AC

Insulation Resistance : 100M Ω Min.

Operation Temperature : -25°C to +85°C

Material :Contact:Phos Bronze,

Tin Plated

Fitting Nail: Brass

Base:Nylon 9T UL94V-0

710-7 3- $\frac{xx}{1}$ $\frac{T}{2}$ $\frac{W}{3}$ $\frac{xx}{4}$ $\frac{xx}{5}$

1. 7: Green Product
2. No. of contacts per row
3. G: Gold flash
S: Selective
T: Tin plated
4. W: White insulator
5. Pinrex internal code.

Poles	Dimensions (mm)		
	A	B	C
2	1.00	4.00	2.45
3	2.00	5.00	3.45
4	3.00	6.00	4.45
5	4.00	7.00	5.45
6	5.00	8.00	6.45
7	6.00	9.00	7.45
8	7.00	10.00	8.45
9	8.00	11.00	9.45
10	9.00	12.00	10.45
11	10.00	13.00	11.45
12	11.00	14.00	12.45
13	12.00	15.00	13.45
14	13.00	16.00	14.45
15	14.00	17.00	15.45



P 頻銳科技股份有限公司
PINREX TECHNOLOGY CORP.

DRAW NO. 710-73-xxTWxx(網頁專用圖)

REV.	DESCRIPTION	DATE
A	RELEASE	2020/10/19

TOLERANCE
.0 = ± 0.30
.00 = ± 0.20
.000 = ± 0.10
.0000 = ± 0.05
ANG.= $\pm 3^\circ$

UNITS : mm
SCALE NONE
SIZE A4

OLD PART NO.
DRAWER 刻偉青
CHECK 李劍
SHEET 1 OF 1
REV. A
APP'D 李劍

TITLE
1.0mm Wire to Board
Wafer SMT 180° Top Entry
NEW PART NO. 710-73-xxTWxx