

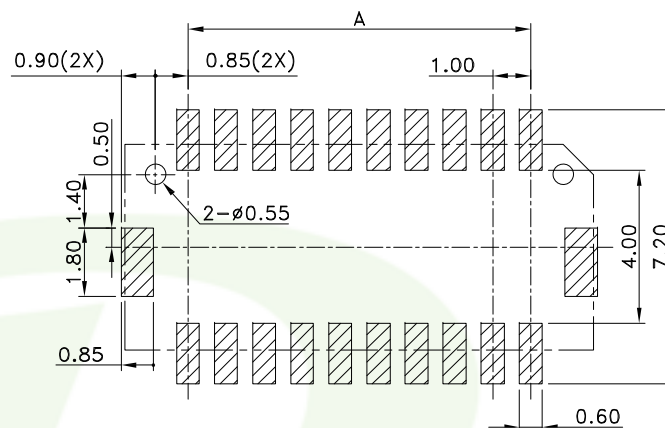
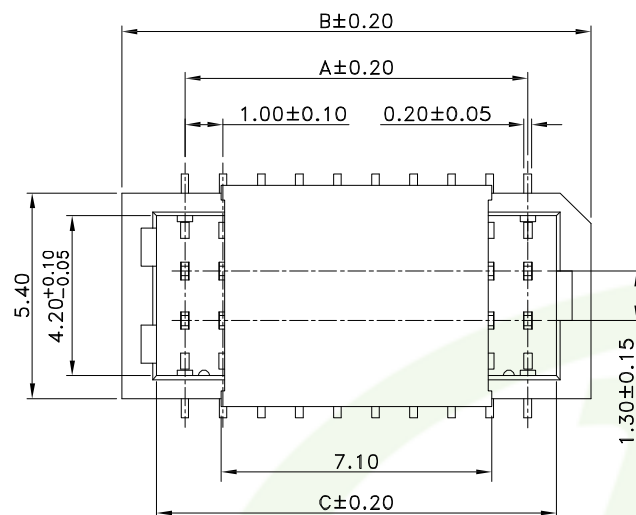



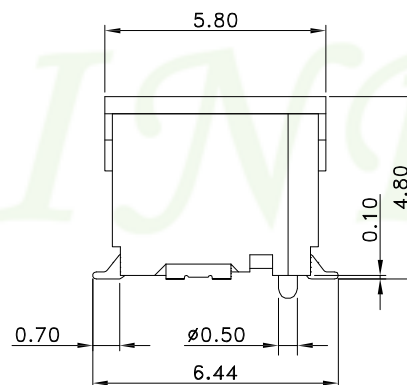

Recommended PCB Layout
General Tolerance ± 0.05

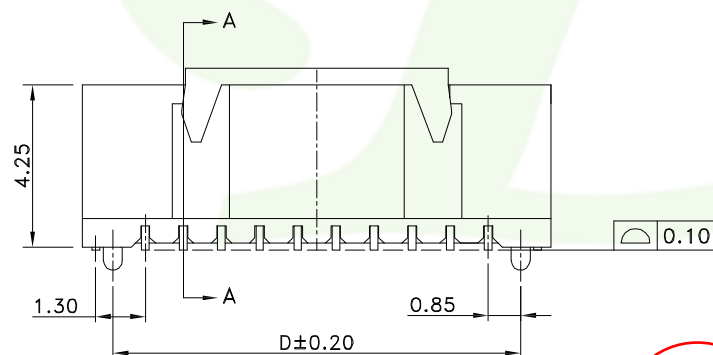

A-A Section

■ SPECIFICATIONS

- Current Rating : 1A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 100M Ω min
- Temperature Range : - 25 $^{\circ}$ C to + 85 $^{\circ}$ C
- Contact Resistance : 20m Ω max
- Material : 1. Contact : Phos. Bronze
2. Solder Nail : Brass ; Matte-Tin plated
High Temperature Plastic,UL94-V0

710-6C-xx $\frac{G}{1}$ $\frac{W}{2}$ $\frac{xx}{3}$ $\frac{xx}{4}$

1. No. of contacts
2. G: Gold flash
T: Tin plated
3. W: White insulator
4. Pinrex internal code.

Poles	Dimensions(mm)			
	A	B	C	D
20	9.00	12.30	10.50	10.70
30	14.00	17.30	15.50	15.70
40	19.00	22.30	20.50	20.70
50	24.00	27.30	25.50	25.70



PINREX 頻銳科技股份有限公司
PINREX TECHNOLOGY CORP.

DRAW NO. 710-6C-xxGWxx (網頁專用圖)

		TOLERANCE		OLD PART NO.		TITLE	
		.0 = ± 0.35				1.0mm Wire to Board Wafer SMT	
		.00 = ± 0.25		DRAWER 刘伟青		S/T Type Dual Rows	
		.000 = ± 0.000		CHECK 李剑			
A RELEASE		2020/10/22		SHEET 1 OF 1		NEW PART NO. 710-6C-xxGWxx	
REV. DESCRIPTION		DATE		APP'D 李剑			
		ANG. = $\pm 3^{\circ}$		SCALE NONE			
				SIZE A4			