


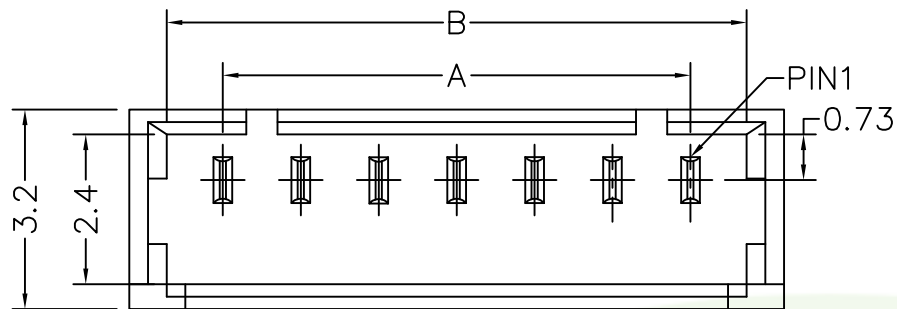

Specification




- 1.Current Reating:1A
- 2.Voltage Rating:125V AC
- 3.Contact Resistance:20mΩ Max.(Initial) 40mΩ Max.(Final)
- 4.Insulation Resistance:100MΩ Min At 500V
- 5.Dielectric Withstanding Voltage: AC 250V/Minute
- 6.Operating Temperature: -25°C~+85°C

Material:

- 1.Housing:HTN UL94V-0
- 2.Contact Pin:Copper Alloy T=0.30mm


712-H7 1-xx 5 W xx
1 2 3 4 5

1. H7: Halogen free
Green Product
2. No. of contacts per row
3. G: Gold flash
- 5: Matte Tin plated
4. W: Nature insulator
5. Pinrex internal code.

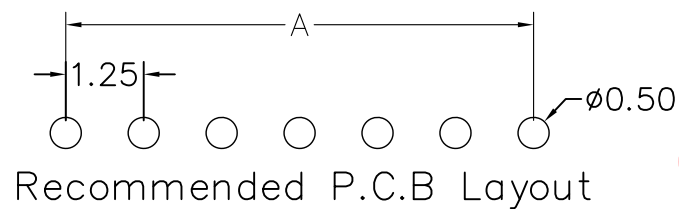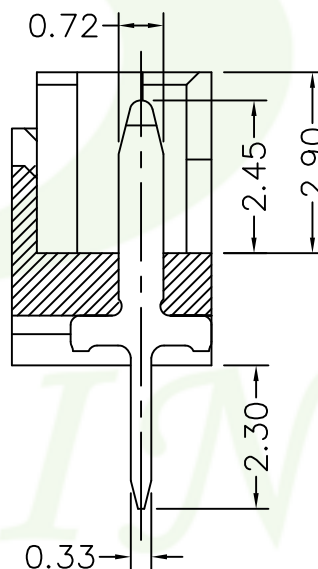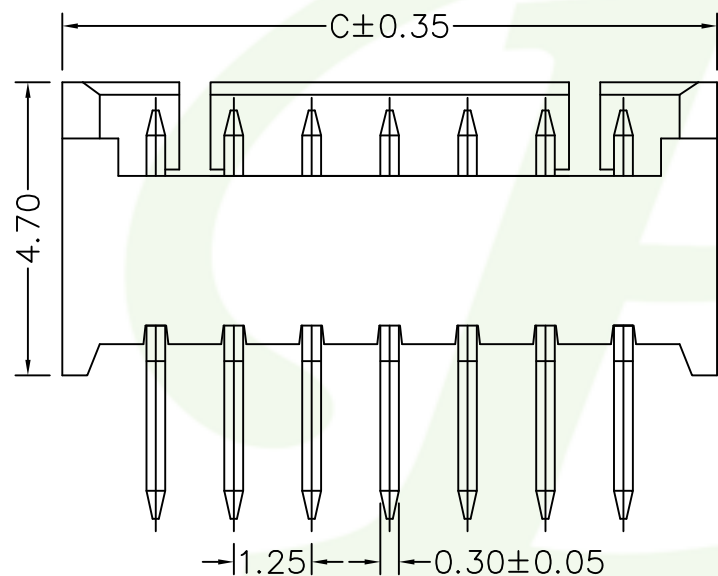

2P&3P

4P&15P

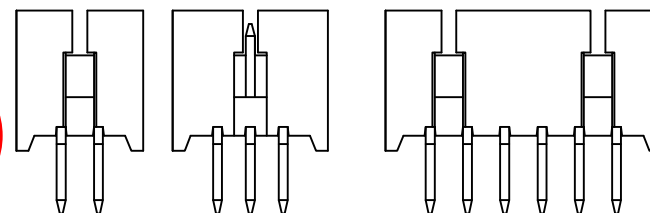

Poles	DIM A	DIM B	DIM C
2	1.25	3.05	4.25
3	2.50	4.30	5.50
4	3.75	5.55	6.75
5	5.00	6.80	8.00
6	6.25	8.05	9.25
7	7.50	9.30	10.50
8	8.75	10.55	11.75
9	10.00	11.80	13.00
10	11.25	13.05	14.25
11	12.50	14.30	15.50
12	13.75	15.55	16.75
13	15.00	16.80	18.00
14	16.25	18.05	19.25
15	17.50	19.30	20.50



			TOLERANCE .0 =±.50 .00 =±.30 .000 =±.XXX .0000=±. ANG.=±3'		OLD PART NO.			TITLE WIRE TO BOARD 1.25mm WAFER DIP 180°	 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.	
					UNITS : mm	DRAWER 劉偉青	CHECK 李劍			
A	RELEASE	2020/10/23		SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李劍		NEW PART NO. 712-H71-xx5Wxx
REV.	DESCRIPTION	DATE								DRAW NO. 712-H71-xx5Wxx (網頁專用圖)