
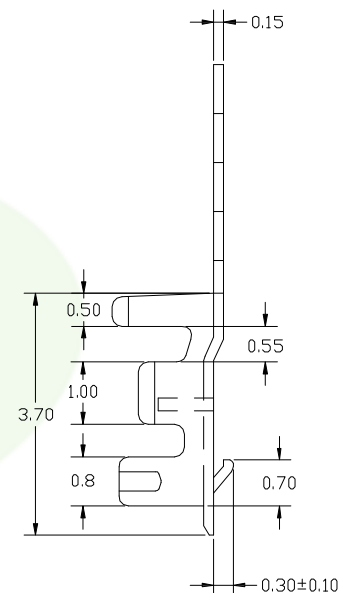


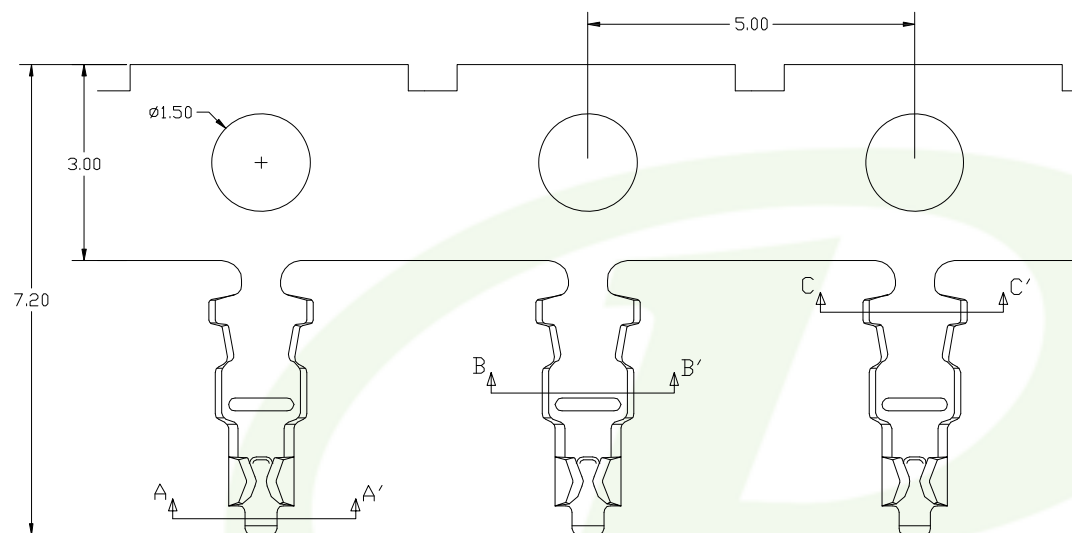

SPECIFICATIONS


- . Voltage Rating : 150V AC/DC
- . Current Rating : 1A AC/DC
- . Withstanding Voltage : 500V AC/minute
- . Insulation Resistance : 500MΩ min
- . Temperature Range : -25°C to +85°C
- . Contact Resistance : 20mΩ max

TERMINAL


- . Applicable Wires : AWG#28-32
- . Material : Phos. Bronze
- . Finish : Tin Plated
- . Thickness : 0.15mm

712-70-T 0055x
1 2 3


- 0: Terminal
- T: Tin plated
- Pinrex internal code.

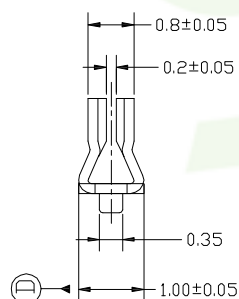

A-A SEC



B-B SEC



C-C SEC



			TOLERANCE			OLD PART NO.		TITLE 1.25mm Crimp Style Connectors Terminal	 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.	
			.0 =±.30 .00 =±.20 .000 =±.XXX	UNITS : mm	DRAWER 刘伟青	CHECK 李劍				
A	RELEASE	2020/11/13	ANG.=±X'		SCALE NONE	SIZE A4	SHEET 1 OF 1			REV. A
REV.	DESCRIPTION	DATE								