

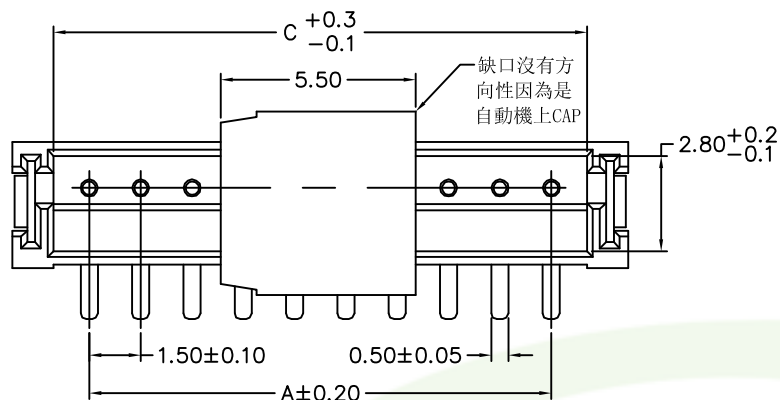




A-A Section

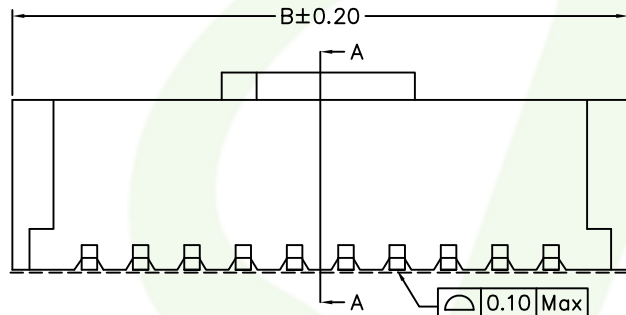

With Cap

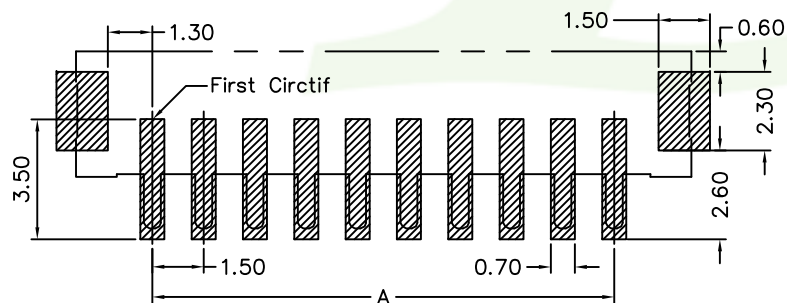

Recommend PCB Layout

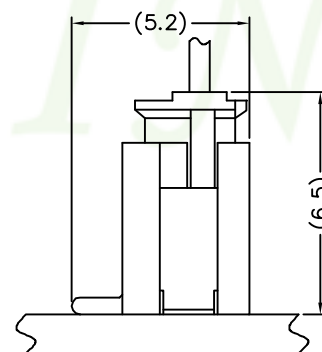

Assembly Layout(REF.)

MATERIAL

Insulator : Nylon 9T, UL94V-0

Cap: Heatproof Resin UL94V-0

Contact Pin: Brass

SPECIFICATION

Current Rate : 1 AMP

Voltage Rating: 50V AC/DC

Dielectric voltage : 500V AC/minute

Insulation Resistance : 500MΩMin.

Contact Resistance : 20mΩMax

Operation Temperature : -25°C to + 85°C

715-7 3-xx T W xx
1 2 3 4 5

1. 7: Green Product
2. No. of contacts per row
3. T: Tin plated
4. W: Nature Insulator
5. Pinrex internal code.

Poles	Dimensions(mm)		
	A	B	C
2	1.50	6.00	3.60
3	3.00	7.50	5.10
4	4.50	9.00	6.60
5	6.00	10.50	8.10
6	7.50	12.00	9.60
7	9.00	13.50	11.10
8	10.50	15.00	12.60
9	12.00	16.50	14.10
10	13.50	18.00	15.60
11	15.00	19.50	17.10
12	16.50	21.00	18.60
13	18.00	22.50	20.10
14	19.50	24.00	21.60
15	21.00	25.50	23.10



			TOLERANCE		UNITS : mm		OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0	±.30					1.5mm PITCH WAFER		
			.00	±.20			DRAWER	劉偉青	SMT S/T CAP+T/R		
			.000	±.10			CHECK	李劍			
A	RELEASE	2020/11/17	.0000	±.		SCALE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
REV.	DESCRIPTION	DATE	ANG.	±3'		NONE	1 OF 1	A	李劍	715-73-xxTWxx	715-73-xxTWxx(網頁專用圖)