



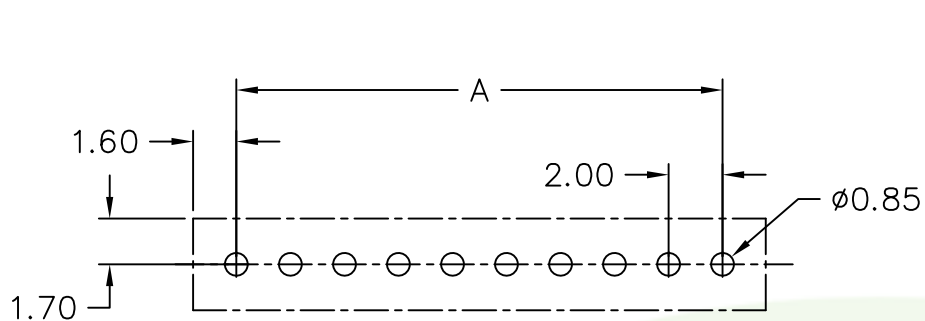

Recommended PCB Layout(Top View)



Mated Drawing(REF.)

SPECIFICATION

Current Rate : 2A AC/DC

Withstanding Voltage: 800V AC/Mintue

Insulation Resistance : 1000M Ω Min





Contact Resistance : 10m Ω Max.

HOUSING

Material: Nylon 66 UL94-V0


702-7 $\frac{5}{1}$ - $\frac{xx}{2}$ $\frac{W}{3}$ $\frac{xxx}{4}$

1. 5:180° HOUSING
2. No. of contacts
3. W: White Insulator
4. Pinrex internal code.

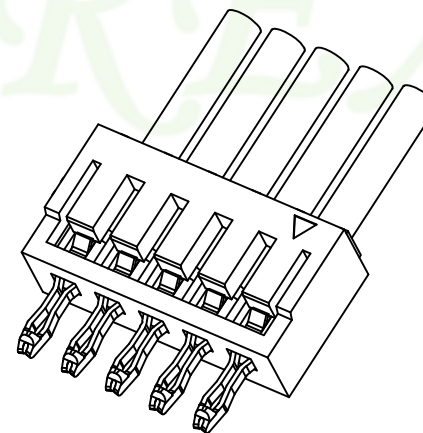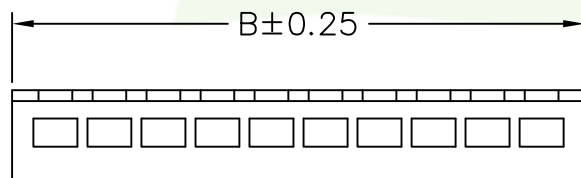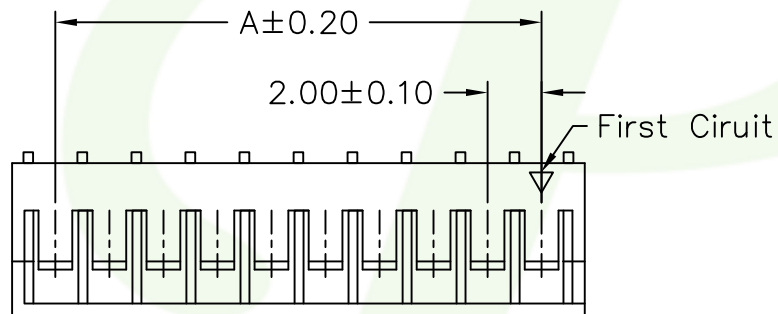

Poles	Dimensions(mm)	
	A	B
2	2.00	5.20
3	4.00	7.20
4	6.00	9.20
5	8.00	11.20
6	10.00	13.20
7	12.00	15.20
8	14.00	17.20
9	16.00	19.20
10	18.00	21.20
11	20.00	23.20
12	22.00	25.20
13	24.00	27.20
14	26.00	29.20
15	28.00	31.20
16	30.00	33.20



			TOLERANCE		 UNITS : mm	OLD PART NO.		TITLE 2.00mm Crimp Style Connectors S/T		 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0 =±.30			DRAWER 刘伟青	CHECK 李剑			
			.00 =±.20		SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李剑	NEW PART NO. 702-75-xxWxxx
			.000 =±.XXX							DRAW NO. 702-75-xxWxxx (網頁專用圖)
A	RELEASE	2020/11/26	.0000=±.							
REV.	DESCRIPTION	DATE	ANG.=±3'							