



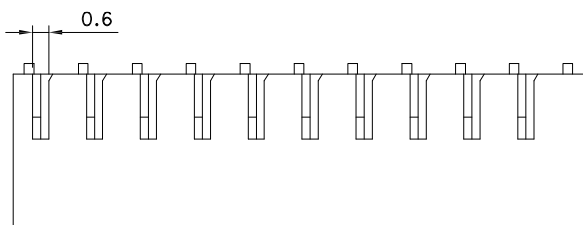
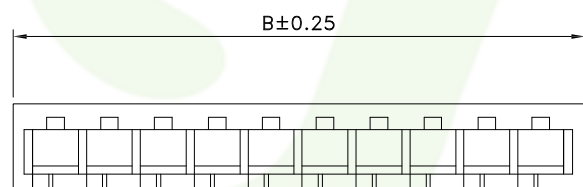


Recommended PCB Layout
General tolerance ± 0.05

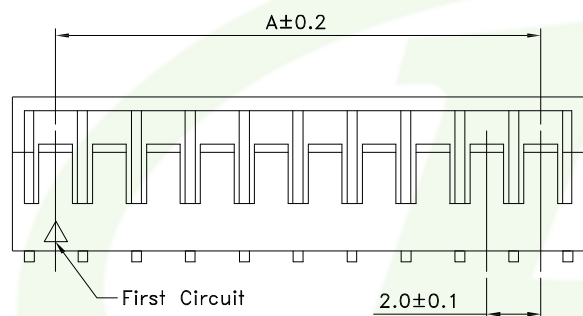

Mated Drawing(REF.)



SPECIFICATION

Current Rate : 2A AC/DC

Withstanding Voltage: 800V AC/Minute

Insulation Resistance : 1000M Ω Min

Contact Resistance : 10m Ω Max.

HOUSING

Material: Nylon 66 UL94-V0

702-7 6- xx W xxx
1 2 3 4

1. 6 : 90° HOUSING
2. No. of contacts
3. W: White Insulator
4. Pinrex internal code.

Poles	Dimensions(mm)	
	A	B
2	2.00	5.20
3	4.00	7.20
4	6.00	9.20
5	8.00	11.20
6	10.00	13.20
7	12.00	15.20
8	14.00	17.20
9	16.00	19.20
10	18.00	21.20
11	20.00	23.20
12	22.00	25.20
13	24.00	27.20
14	26.00	29.20
15	28.00	31.20
16	30.00	33.20

文管中心
2020.11.26
發行章

			TOLERANCE				OLD PART NO.		TITLE 2.00mm Crimp Style Connectors R/A		 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.		
			.0 =±.30		UNITS : mm		DRAWER 刘伟青					CHECK 李剑	
			.00 =±.20										
			.000 =±.XXX										
A	RELEASE	2020/11/26	.0000=±.		SCALE NONE		SHEET 1 OF 1		REV. A	APP'D 李剑		NEW PART NO. 702-76-xxWxxx	DRAW NO. 702-76-xxWxxx (網頁專用圖)
REV.	DESCRIPTION	DATE	ANG.=±3°		SIZE A4								