

SPECIFICATIONS





Voltage Rating: 100V AC/DC
Current Rating: 2A AC/DC
Withstanding Voltage: 800V AC/minute
Insulation Resistance: 1000M Ω min
Temperature Range: -40°C to +105°C
Contact Resistance: 20m Ω max

MATERIAL

Contact: Phos. Bronze,
Base: Nylon 9T UL94V-0
Cap: Nylon PA46 UL94V-0

721-9 3- xx T W xx
1 2 3 4 5

- 3: SMT Straight type
- No. of contacts per row
- T: Tin plated
- W: Nature Insulator
- Pinrex internal code.

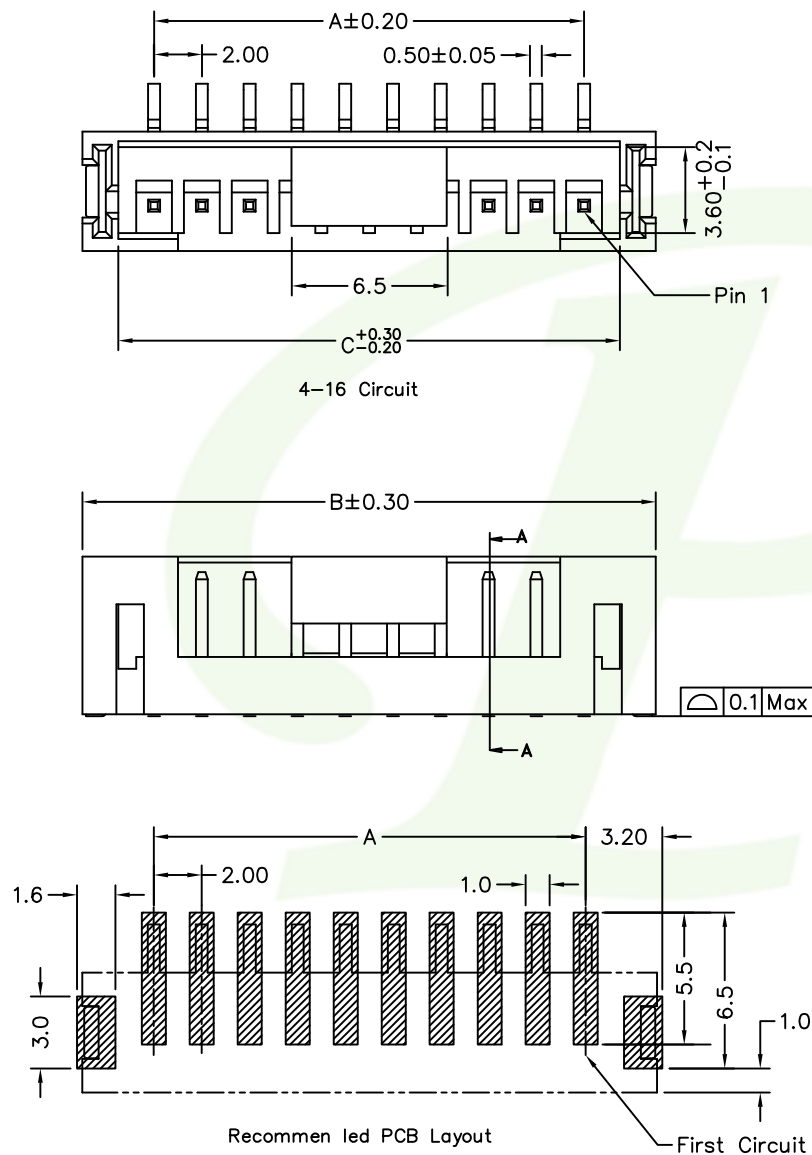

Poles	Dimensions(mm)		
	A	B	C
2	2.00	8.00	5.00
3	4.00	10.00	7.00
4	6.00	12.00	9.00
5	8.00	14.00	11.00
6	10.00	16.00	13.00
7	12.00	18.00	15.00
8	14.00	20.00	17.00
9	16.00	22.00	19.00
10	18.00	24.00	21.00
11	20.00	26.00	23.00
12	22.00	28.00	25.00
13	24.00	30.00	27.00
14	26.00	32.00	29.00
15	28.00	34.00	31.00
16	30.00	36.00	33.00

PINREX 頻銳科技股份有限公司
PINREX TECHNOLOGY CORP.
DRAW NO. 721-93-xxTWxx(網頁專用圖)

REV.	DESCRIPTION	DATE
A	RELEASE	2020/11/30

TOLERANCE
.0 = ± 0.30
.00 = ± 0.20
.000 = ± 0.10
.0000 = ± 0.05
ANG. = $\pm 3^\circ$

UNITS : mm
SCALE NONE
SIZE A4

OLD PART NO.		DRAWER		CHECK	
		1 OF 1		APP'D	
		REV. A		李劍	

TITLE		NEW PART NO.	
2.0mm WIRE TO BOARD WAFER SMT S/T TYPE CAP+T/R		721-93-xxTWxx	