
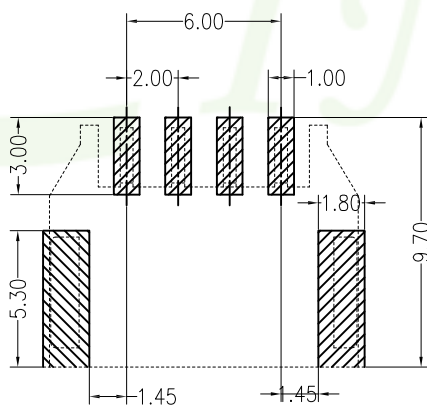
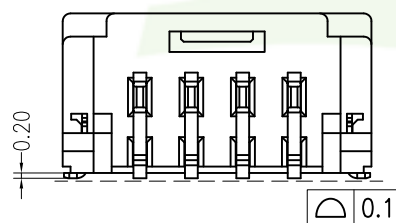





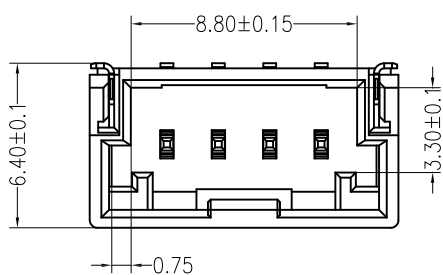

PCB LAYOUT

Main Specifications

(Contact resistance): $\leq 10m\Omega$
 (Insulation resistance): $\geq 1000M\Omega$
 (Rated voltage): 125V AC DC
 (Rated current): 3.0A AC DC
 (Withstand Voltage): 500V AC/minute
 (Temperature Range): $-40^{\circ}C \sim +125^{\circ}C$

721-9 4- $\frac{xx}{2} \times \frac{W}{3} \times \frac{xF}{4} \times \frac{F}{5}$

1. 9: Green Product High Temp
2. No. of contacts per row
3. T: Tin plated
- 5: Matte Tin plated
4. W: Natural Insulator
5. Pinrex internal code.



C	SOLDER TAB		2 PCS	PhosphorBronze	MATTE Sn-plated
B	CONTACT		4 PCS	PhosphorBronze	MATTE Sn-plated
A	HOUSING		1 PCS	PA9T	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH

TITLE 2.00mm 90°WAFER SMT TYPE			頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.		
NEW PART NO. 721-94-xxxWxF			DRAW NO. 721-94-xxxWxF(網頁專用圖)		

TOLERANCE		OLD PART NO.	
.0	=±.30	DRAWER 姜文慧	CHECK 李劍
.00	=±.20	SCALE NONE	SIZE A4
.000	=±.XXX	SHEET 1 OF 1	REV. A
.0000	=±.	APP'D 李劍	
ANG.=±3'			
A	RELEASE	2021/01/04	
REV.	DESCRIPTION	DATE	