

MATERIAL

Insulator: PBT

SPECIFICATIONS

Contact resistance: $\leq 10m\Omega$

Insulation resistance: $\geq 1000M\Omega$

Rated voltage: 125V AC DC





Rated current: 3.0A AC DC


Withstand Voltage: 500V AC/minute

Temperature Range: $-40^{\circ}C \sim +105^{\circ}C$

721-75-xx W xxF
1 2 3 4

1. 7: Green Product
2. No. of contacts per row
3. W: White insulator
4. Pinrex internal code.

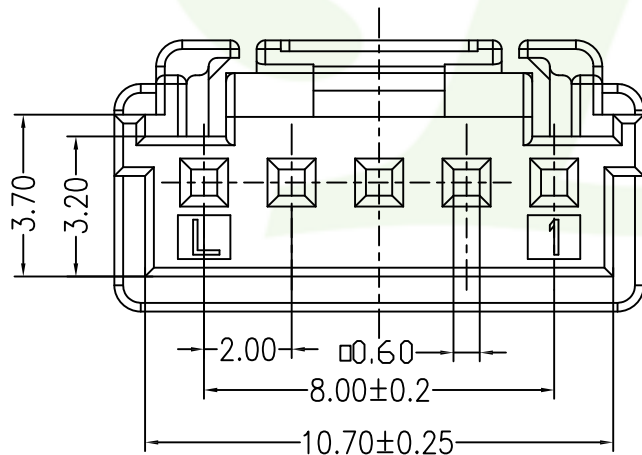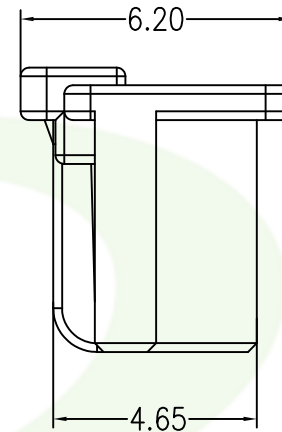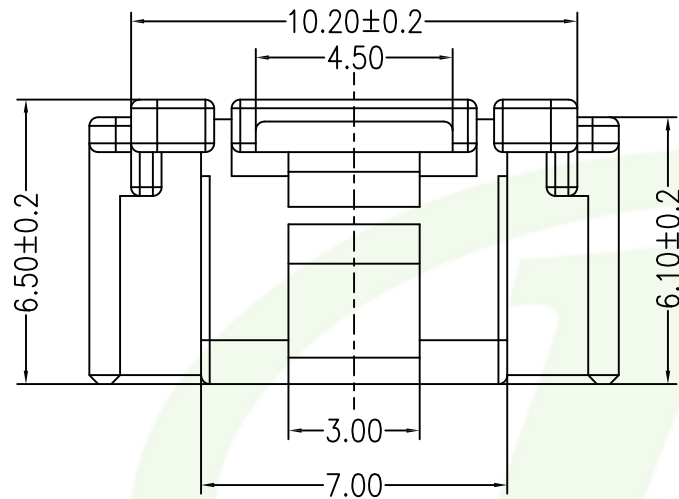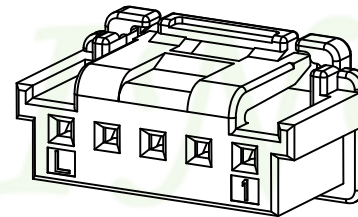

			TOLERANCE		 UNITS : mm	OLD PART NO.		TITLE 2.0mm Housing		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.	
			.0	=±.30		DRAWER	CHECK				
			.00	=±.25		麦文慧	李劍				
			.000	=±.XXX							
A	RELEASE	2021/01/04	.0000	=±.		SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.	
REV.	DESCRIPTION	DATE	ANG.=±3'			1 OF 1	A	李劍	721-75-xxWxxF	721-75-xxWxxF(網頁專用圖)	
					SCALE	SIZE					
					NONE	A4					