



Insulator : NYLON 66 UL94V-0
Contact Pin : Brass

Current Rate : 3A AC/DC
Insulation Resistance : 1000MΩmin.
Contact Resistance : 20mΩMax.
Withstanding Voltage : 800V AC/minute
Operation Temperature : -25°C to + 85°C

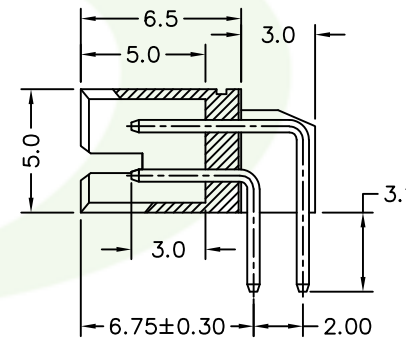

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2x2	2.00	6.00	12x2	22.00	26.00
3x2	4.00	8.00	13x2	24.00	28.00
4x2	6.00	10.00	14x2	26.00	30.00
5x2	8.00	12.00	15x2	28.00	32.00
6x2	10.00	14.00	16x2	30.00	34.00
7x2	12.00	16.00	17x2	32.00	36.00
8x2	14.00	18.00	18x2	34.00	38.00
9x2	16.00	20.00	19x2	36.00	40.00
10x2	18.00	22.00	20x2	38.00	42.00
11x2	20.00	24.00			

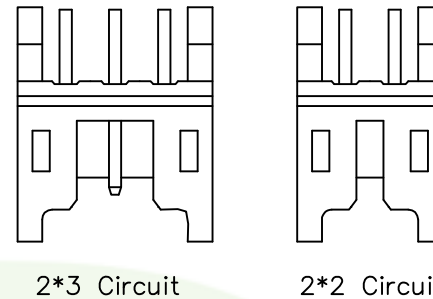

				TOLERANCE				OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.	
				.0 =±.30		UNITS : mm		DRAWER		CHECK		2.0mm R/A CONNECTORS WAFER	
				.00 =±.20				劉偉青 李劍					
				.000 =±.XXX									
A RELEASE		2020/12/02		.0000=±.		SCALE		SHEET		NEW PART NO.		DRAW NO.	
REV. DESCRIPTION		DATE		ANG.=±3'		NONE		1 OF 1		725-72-xxTWxx		725-72-xxTWxx (網頁專用圖)	
						A4		REV. APP'D		李劍			