
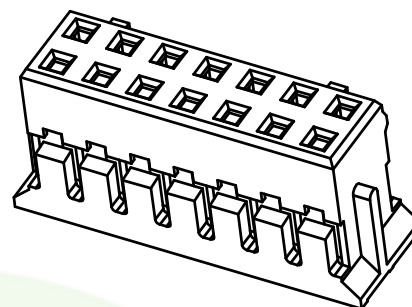


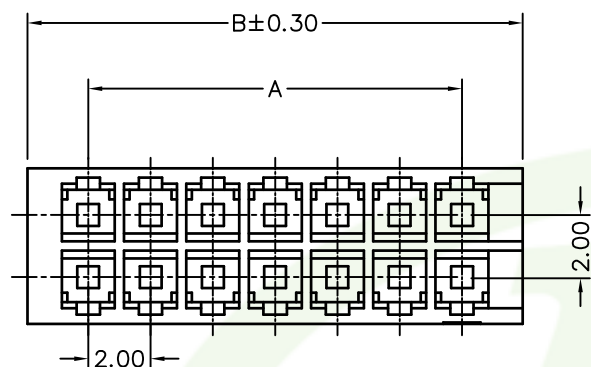



3D VIEW

MATERIAL
Insulator : NYLON 66 UL94V-0


SPECIFICATION
Current Rate : 3A AC/DC
Insulation Resistance : 1000MΩmin.
Withstand Voltage : 800V AC/minute
Operation Temperature : -25°C to + 85°C
Contact Resistance: 20mΩmax

725-7 5- $\frac{xx}{1}$ $\frac{W}{2}$ $\frac{xxx}{3}$

1. No. of contacts
2. W: White Insulator
3. Pinrex internal code.

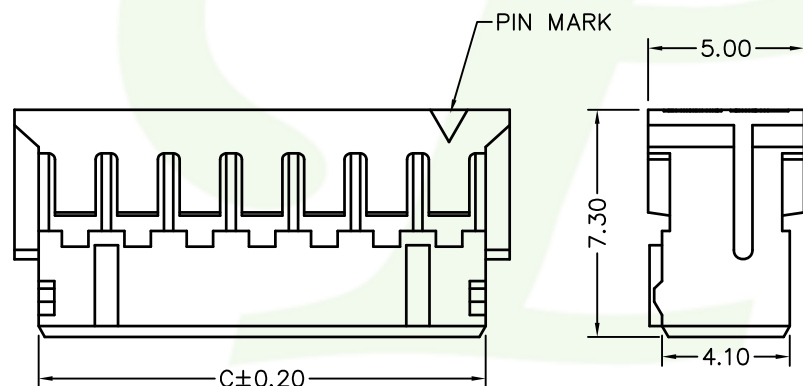

2*3PIN VIEW



2*2PIN VIEW

Poles	Dimensions(mm)		
	A	B	C
2x2	2.0	5.9	4.35
3x2	4.0	7.9	6.35
4x2	6.0	9.9	8.35
5x2	8.0	11.9	10.35
6x2	10.0	13.9	12.35
7x2	12.0	15.9	14.35
8x2	14.0	17.9	16.35
9x2	16.0	19.9	18.35
10x2	18.0	21.9	20.35
11x2	20.0	23.9	22.35
12x2	22.0	25.9	24.35
13x2	24.0	27.9	26.35
14x2	26.0	29.9	28.35
15x2	28.0	31.9	30.35
16x2	30.0	33.9	32.35
17x2	32.0	35.9	34.35
18x2	34.0	37.9	36.35
19x2	36.0	39.9	38.35
20x2	38.0	41.9	40.35



			TOLERANCE		 UNITS : mm	OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.	
			.0 =±.30 .00 =±.20 .000 =±.XXX .0000=±. ANG.=±3'			DRAWER 劉偉青					
A	RELEASE	2020/12/01				SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A		APP'D 李劍
REV.	DESCRIPTION	DATE						NEW PART NO. 725-75-xxWxxx			DRAW NO. 725-75-xxWxxx(網頁專用圖)