

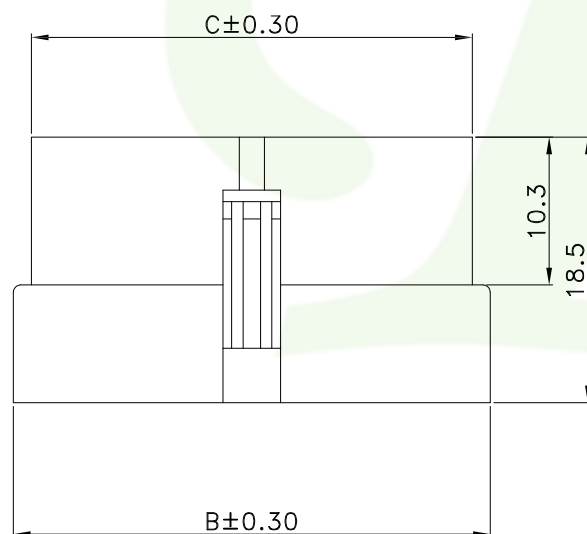
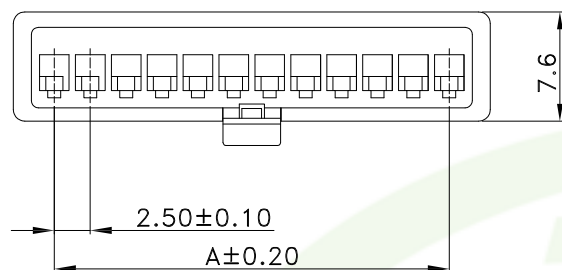


Single-Row

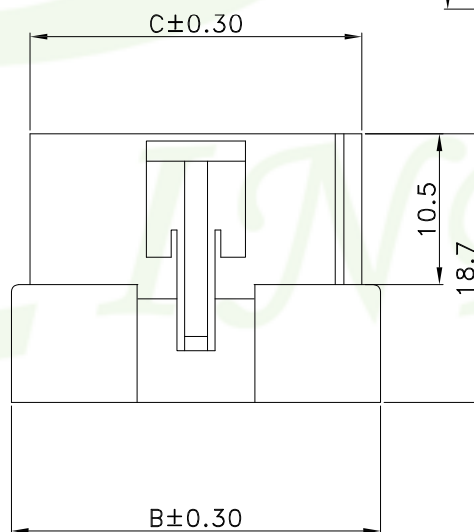

Dual-Row

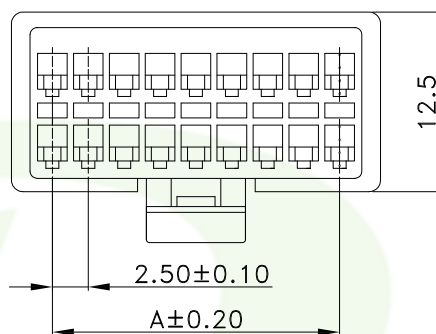


SPECIFICATIONS

Current Rating: 3A AC/DC
Withstanding Voltage: 1500V AC/minute
Insulation Resistance: 500MΩmin

RECEPTACLE HOUSING

Material: Nylon 66 UL 94V-0

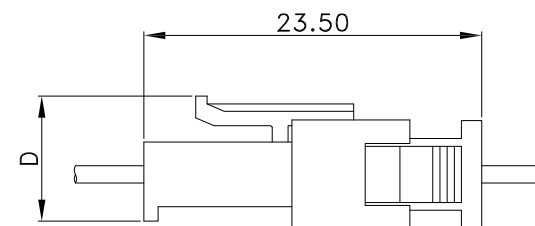

Poles	D
02~12	8.7
16,18	14.5

Assembled Dimension

750-7 5- F xx B xx
1 2 3 4 5

1. 5: Housing
2. F: Female
3. No. of contacts
4. B: Black Insulator
5. Pinrex internal code.

Poles	Dimensions		
	A	B	C
02	—	8.1	5.5
03	5.00	10.7	8.0
04	7.50	13.2	10.6
05	10.00	15.7	13.1
06	12.50	18.2	15.6
07	15.00	20.7	18.1
08	17.50	23.2	20.7
09	20.00	25.7	23.1
10	22.50	28.4	25.6
11	25.00	30.7	28.1
12	27.50	33.2	30.7

文管中心
2020.12.15
發行章
