
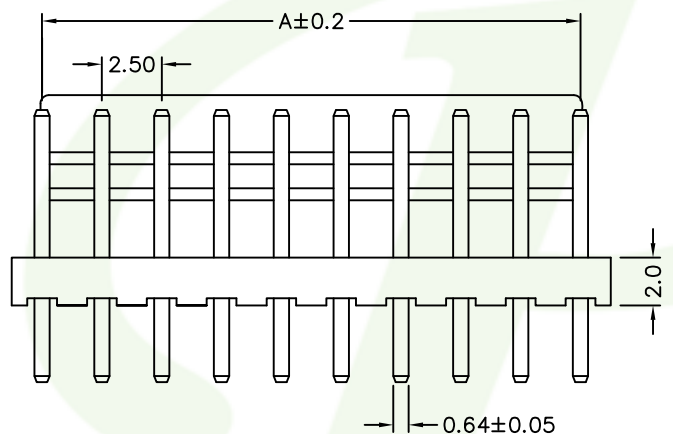


Recommended P.C.B Layout

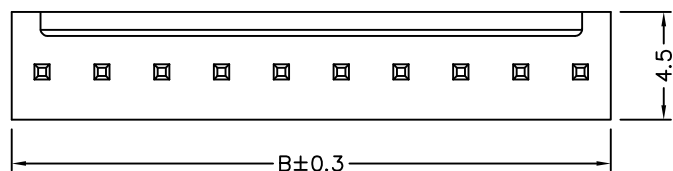


Specifications

Current Rating: 3A AC, DC
Withstand Voltage: 1000V AC/minute
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Terminal Material: Brass/ Tin-plated
Material: Nylon 66, UL 94V-2

752- $\frac{7}{1}$ $\frac{1}{2}$ - $\frac{xx}{3}$ $\frac{T}{4}$ $\frac{W}{5}$ $\frac{xx}{6}$

- 7: Green product
- 1: Straight type
- No. of contacts per row
- T: Tin plated
- W: Nature Color Insulator
- Pinrex internal code.

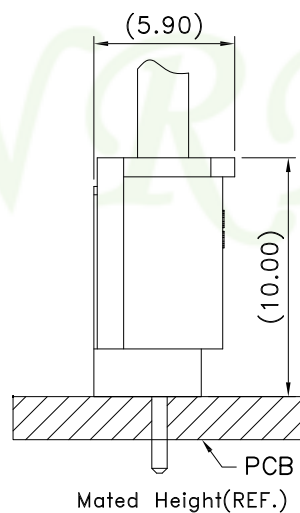

CIRCUITS	DIM A	DIM B
2	2.50	5.00
3	5.00	7.50
4	7.50	10.00
5	10.00	12.50
6	12.50	15.00
7	15.00	17.50
8	17.50	20.00
9	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50

			TOLERANCE				OLD PART NO.		TITLE 2.50 WAFER DIP 180° TYPE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.	
			.0 =±.30 .00 =±.20 .000 =±.XXX .0000=±. ANG.=±3'		UNITS : mm		DRAWER 姜文慧 CHECK 李劍					
A	RELEASE		2020/12/02			SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李劍	NEW PART NO. 752-71-xxTWxx	DRAW NO. 752-71-xxTWxx(網頁專用圖)
REV.	DESCRIPTION		DATE									