
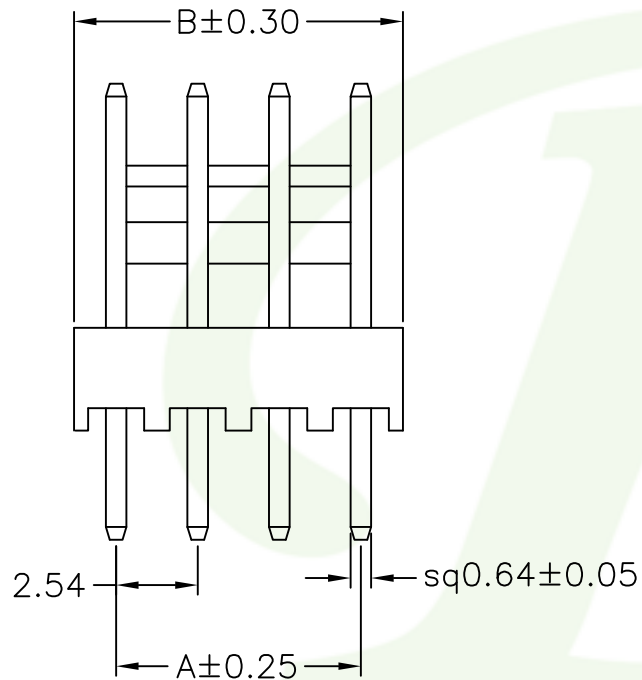
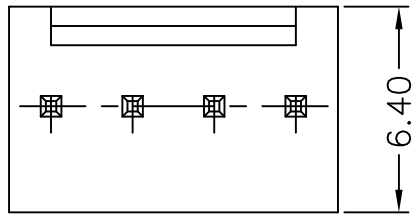


Recommended P.C.B Layout

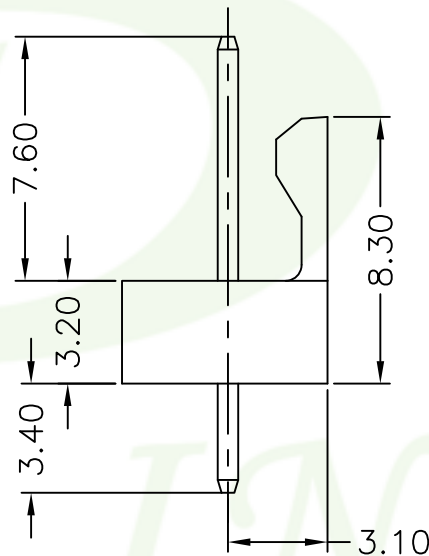

MATERIAL

Housing : Thermoplastic UL 94V-0

Contact Pin : Copper Alloy

SPECIFICATION

Current Rating : 3A AC/DC

Voltage Rating : 250V AC/DC

Contact Resistance : 20mΩMax

Insulation Resistance : 1000MΩMin.

Withstand Voltage : AC1000V/Minute

Operating Temperature : -25°C~+85°C

744-7 1-xx T W x x
1 2 3 4 5

1. 7: Green Product
2. No. of contacts per row
3. T: Tin plated
4. W: Nature Color Insulator
5. Pinrex internal code.

Poles	Dimension mm	
	A	B
2	2.54	5.10
4	7.62	10.24
5	10.16	12.78
6	12.70	15.24
7	15.24	17.88
8	17.78	20.44
9	20.32	23.00
10	22.86	25.54
11	25.40	28.10
12	27.94	30.64
13	30.48	33.20
14	33.02	35.74
15	35.56	38.30
16	38.10	40.84
17	40.64	43.40
18	43.18	45.94
19	45.72	48.50
20	48.26	51.05