





POLARIZATION SLOT LOCATION




02 Poles



03 Poles

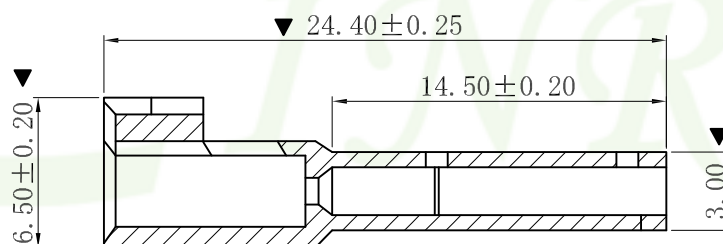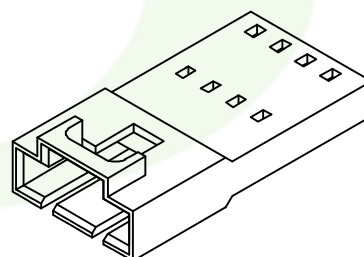

SECTION: A-A

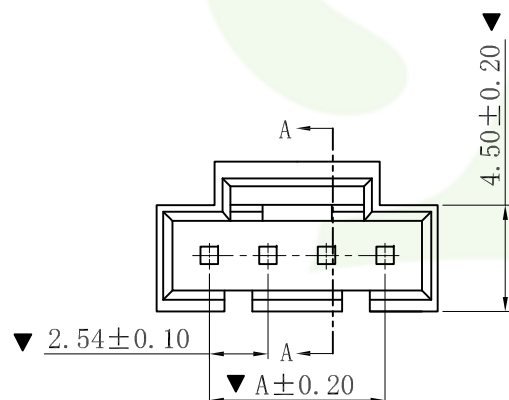

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω min

HOUSING

- Poles : 02-20P
- Housing Material: PA66 15%GF UL94V-0 Black

745-7 $\frac{5}{1}$ - $\frac{xx}{3}$ $\frac{B}{4}$ F $\frac{xx}{5}$

1. 7: Green Product
2. 5: Housing
3. No. of contacts per row
4. B: Black insulator
5. Pinrex internal code.

Poles	Dimensions(mm)	
	A	B
02	2.54	7.12
03	5.08	9.66
04	7.62	12.20
05	10.16	14.74
06	12.70	17.28
07	15.24	19.82
08	17.78	22.36
09	20.32	24.90
10	22.86	27.44
11	25.40	29.98
12	27.94	32.52
13	30.48	35.06
14	33.02	37.60
15	35.56	40.14
16	38.10	42.68
17	40.64	45.22
18	43.18	47.76
19	45.72	50.30
20	48.26	52.84



			TOLERANCE				OLD PART NO.		TITLE 2.54mm Female Housing		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.	
			.0 =±.25		UNITS : mm		DRAWER 姜文慧					CHECK 李劍
			.00 =±.20									
			.000 =±.XXX									
A RELEASE			2021/01/04		SCALE NONE		SHEET 1 OF 1		NEW PART NO.			DRAW NO. 745-75-xxBFxx (網頁專用圖)
REV. DESCRIPTION			DATE		SIZE A4		REV. A		APP'D 李劍			
									745-75-xxBFxx			