


STRAIGHT TYPE, WITH POST REEL

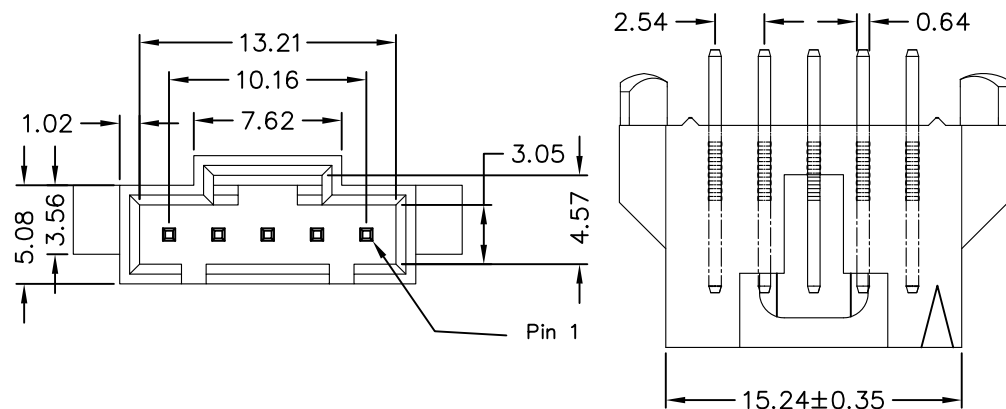

MATERIAL

Insulator: NY6T

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 8 AMP PER PIN (20AWG)




Insulation Resistance : 1000MΩMin. at DC 500V

Contact Resistance : 30mΩMax. at DC 100mA




Dielectric Voltage : 500V AC for one minute

209-x 0- xx x x R01C
1 2 3 4 5 6

W/O POST & W/O STAND OFF

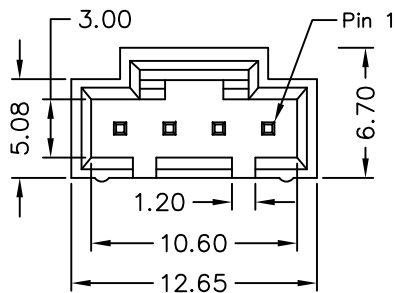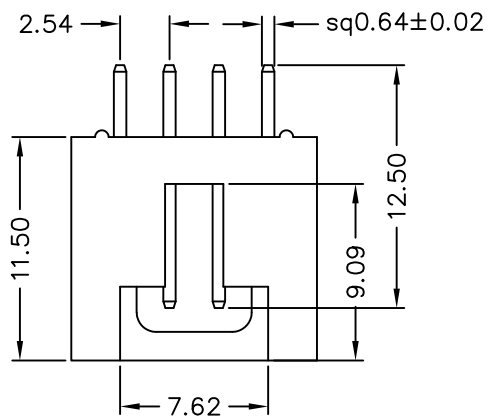

W/S POST & W/S STAND OFF

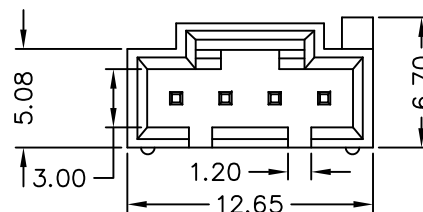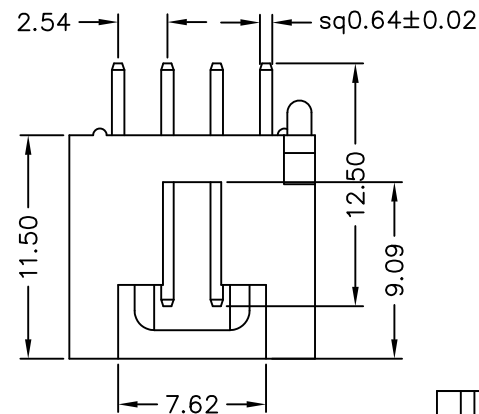

- 7: Green Product
- 9: Green Product High Temp
- 0: 180°
- 1: 90°
- No. of contacts per row
- G: Gold flash
- S: Selective(15u"Gold plated;Matte Tin plated)
- B: Black Insulator
- W: White Insulator
- R01C: 端子打K印型
- 20: W/O post & W/O stand off
- 10: Stand