
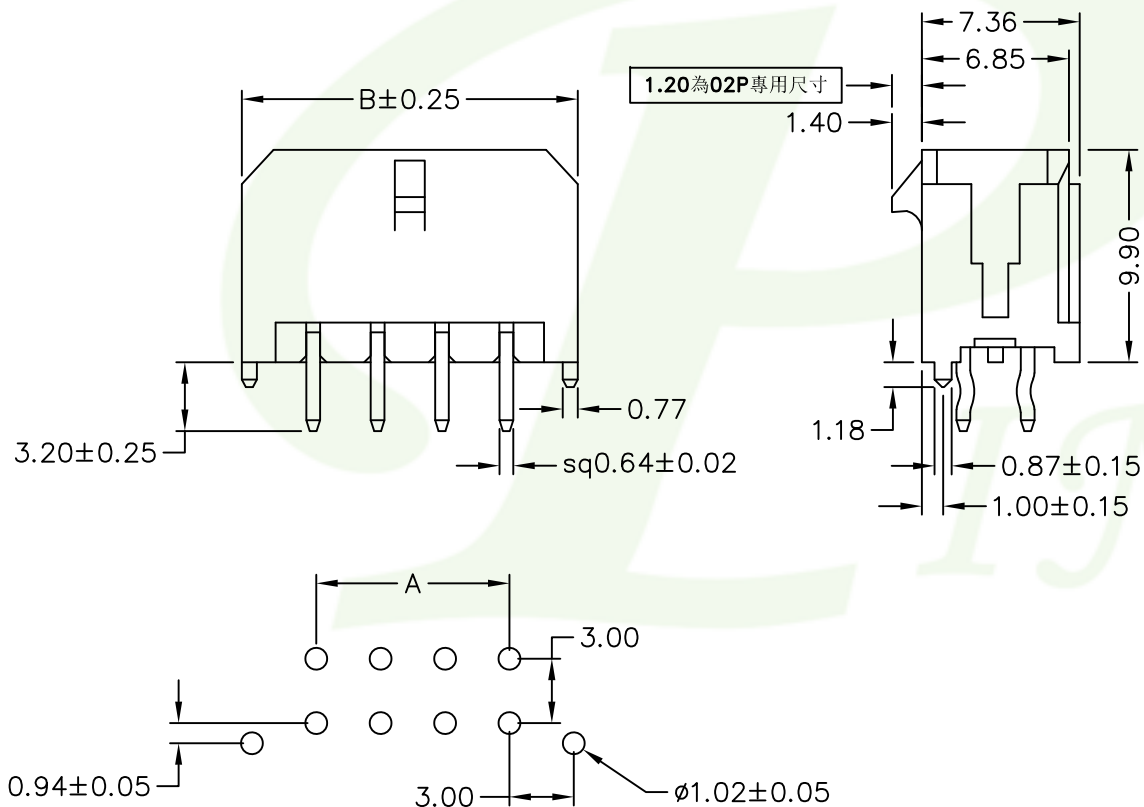


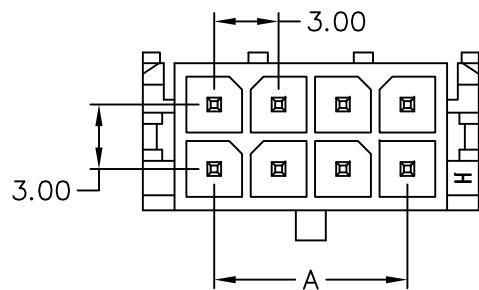

Recommended P.C.B Layout

MATERIAL:

Material: NY6T UL94-V0

Contacts: Brass

SPECIFICATIONS:

Current Rating: 5A AC.DC

Voltage Rating: 250V AC.DC

Contact Resistance: 10mΩ max

Insulation Resistance: 1000MΩ Min

Temperature Range: -25°C~+85°C

Withstanding Voltage: 1500V AC/minute

733-7 1- xx T B xx
1 2 3 4 5 6

- 7: Green Product
- 1: Straight Type
- No. of contacts
- T: Tin plated
- B: Black Insulator
- Pinrex internal code.

POLES	Dimensions	
	A	B
2P	—	6.70
4P	3.00	9.70
6P	6.00	12.70
8P	9.00	15.70
10P	12.00	18.70
12P	15.00	21.70
14P	18.00	24.70
16P	21.00	27.70
18P	24.00	30.70
20P	27.00	33.70
22P	30.00	36.70
24P	33.00	39.70



TOLERANCE			UNITS : mm		OLD PART NO.		TITLE		DRAW NO.
.0	=±.30				DRAWER	CHECK	3.0mm WAFER DIP		
.00	=±.20				李劍	李劍	180° Double Rows		
.000	=±.XXX				REV. A	APP'D	NEW PART NO.	733-71-xxTBxx	733-71-xxTBxx(網頁專用圖)
.0000	=±.								
ANG.=±3'									
A	RELEASE	2020/11/17	SCALE	SIZE	SHEET	REV.			
REV.	DESCRIPTION	DATE	NONE	A4	1 OF 1	A			

PINREX 頻銳科技股份有限公司
PINREX TECHNOLOGY CORP.