


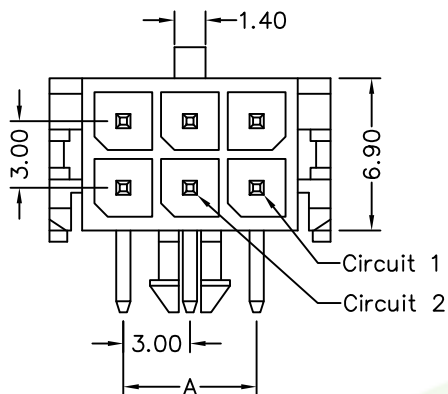

MATERIAL:

Insulator::NY6T UL94V-0

Contacts: Brass

SPECIFICATION:

Current Rating: 5A AC/DC

Voltage Rating: 250V AC/DC

Contact Resistance: 10mΩ max

Insulation Resistance: 1000MΩMin

Temperature Range: -25°C~+85°C

文管中心







2020.11.23

發行章

733-7 2- xx T B x x
1 2 3 4 5 6 7

- 7: Green Product
- 2: Right angle type
- No. of contacts
- T: Tin plated
- B: Black Insulator
- 1: With post
- Pinrex internal code.

PIN NO	Dimensions	
	A	B
2X01P	—	6.75
2X02P	3.00	9.75
2X03P	6.00	12.75
2X04P	9.00	15.75
2X05P	12.00	18.75
2X06P	15.00	21.75
2X07P	18.00	24.75
2X08P	21.00	27.75
2X09P	24.00	30.75
2X10P	27.00	33.75
2X11P	30.00	36.75
2X12P	33.00	39.75

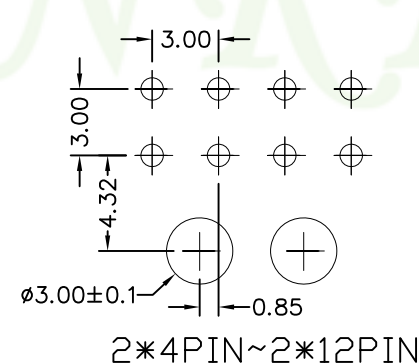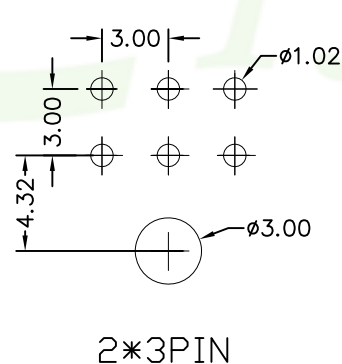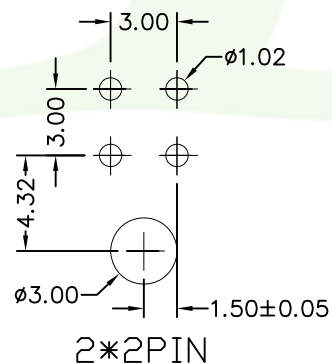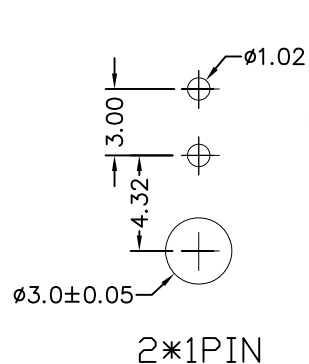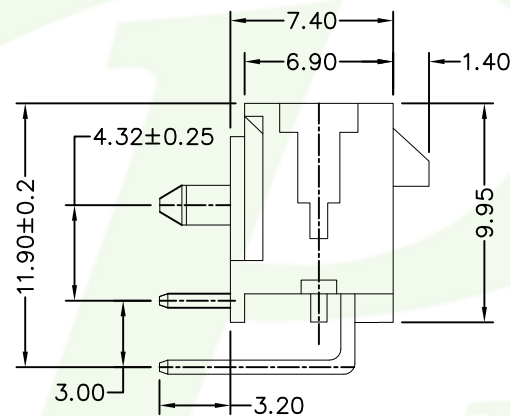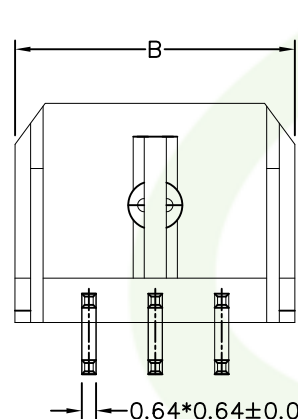

Recommended P.C.B Layout

			TOLERANCE				OLD PART NO.		TITLE 3.0MM WAFER DIP 90° Double Rows		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0 =±.50 .00 =±.35 .000 =±.XXX .0000=±. ANG.=±3°		UNITS : mm		DRAWER 麦文慧				
A	RELEASE	2020/11/17			SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李创	NEW PART NO. 733-72-xxTBxx	
REV.	DESCRIPTION	DATE									