


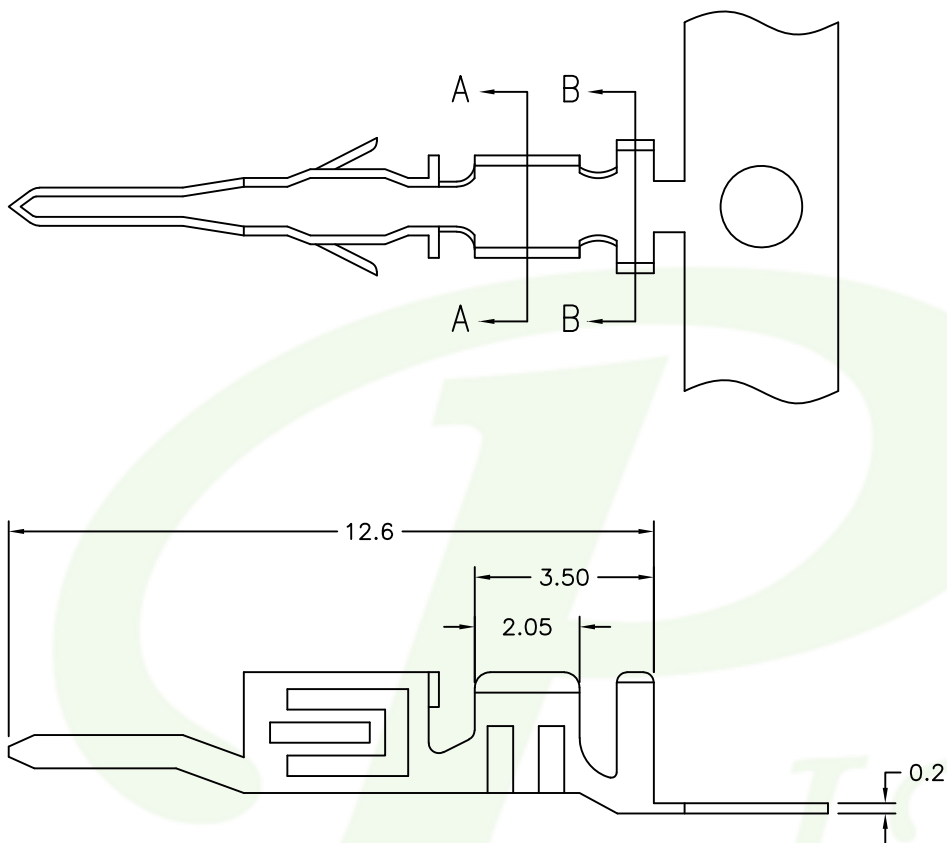

Sec. A-A

Sec. B-B

FEATURES

Material: Phosphor bronze

Finished: Tin-plated

Wire range: #20-24AWG

Thickness : 0.2 mm

SPECIFICATIONS

Current rating

Wire size	#20	#22	#24
Ampere	5A	5A	4A

Voltage rating: 250V AC(RMS) or DC

Contact resistance: 10mΩmax

Dielectric strength: 1500V AC/minute

Temperature rise: 30°C max

(carry rated current load)

733-70- $\frac{M}{1} \frac{T}{2} \frac{xxxx}{3}$

1. M: Male
2. T: Terminal
3. Pinrex internal code.
High Foot



			TOLERANCE		OLD PART NO.		TITLE	
			.0	=±.30	DRAWER 姜文慧		3.0mm Crimp Terminal	
			.00	=±.25	CHECK 李创		Male AWG#20~24	
			.000	=±.XXX	SHEET 1 OF 1		NEW PART NO. 733-70-MTxxxx	
			.0000=±.		REV. A		DRAW NO. 733-70-MTxxxx(網頁專用圖)	
			ANG.=±3'		APP'D 李创			
A	RELEASE	2020/11/13						
REV.	DESCRIPTION	DATE						