
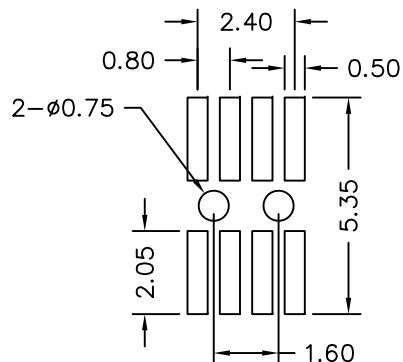
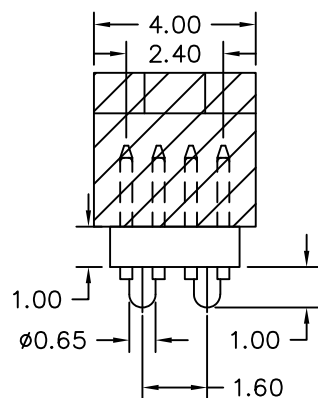


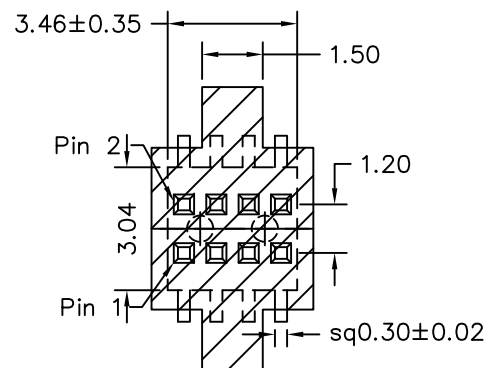

Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 15mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

262-x 7- xx x x xx
1 2 3 4 5 6

- 7: Green Product
9: Green Product High Temp
- 7: Dual rows
Plastic Height=1.0mm
- No. of contacts per row
- G: Gold flash
T: Tin plated
- B: Black Insulator
- Pinrex internal code.
1R=900PCS



			TOLERANCE				OLD PART NO.		TITLE PIN HEADER 0.8*1.2mm SMT S/T TYPE, DUAL ROWS HEIGHT=1.0mm,CAP+TAPE REEL		 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.	
			.0 =±.30	UNITS : mm	DRAWER 麦文慧	CHECK 李剑						
			.00 =±.20									
			.000 =±.XXX									
A	RELEASE	2020/10/23	.0000=±.	SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李剑	NEW PART NO. 262-x7-xxxxxxx	DRAW NO. 262-x7-xxxxxxx(網頁專用圖)		
REV.	DESCRIPTION	DATE	ANG.=±3°									