
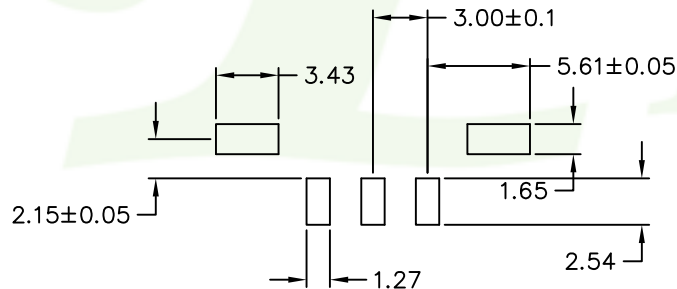

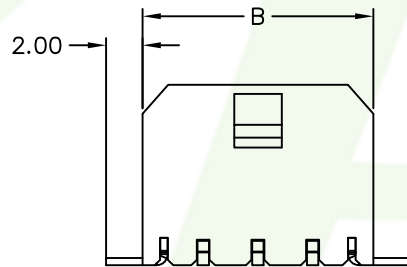



Shown with disposable cap

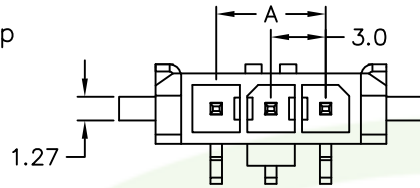

PCB Layout: Component side

MATERIAL

Housing: LCP

Contact Pin : Brass

SPECIFICATION

Current rating : 5A AC, DC

Voltage rating : 250V AC, DC

Dielectric Withstanding voltage : 1500V AC/minute

Contact Resistance : 10mΩMax.

733-9 $\frac{A-}{1}$ $\frac{xx}{2}$ $\frac{T}{3}$ $\frac{B}{4}$ $\frac{Rx}{5}$

1. A: SMT S/T Single Row
2. No. of contacts
3. T: Tin plated
4. B: Black Insulator
5. Rx: Fitting Nail

文管中心
2020.11.24
發行章

POLES	DIM A	DIM B
2	3.0	9.65
3	6.0	12.65
4	9.0	15.65
5	12.0	18.65
6	15.0	21.65
7	18.0	24.65
8	21.0	27.65
9	24.0	30.65
10	27.0	33.65
11	30.0	36.65
12	33.0	39.65

					TOLERANCE				OLD PART NO.			TITLE 3.0mm CONNECTOR SMT S/T Single Row FN,CAP+T/R			 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.							
					.0 =±.25 .00 =±.20 .000 =±.XXX		UNITS : mm		DRAWER 姜文慧		CHECK 李劍											
A RELEASE			2020/11/19		.0000=±. ANG.=±3'		SCALE NONE		SIZE A4		SHEET 1 OF 1		REV. A		APP'D 李劍		NEW PART NO. 733-9A-xxTBRx			DRAW NO. 733-9A-xxTBRx(網頁專用圖)		
REV. DESCRIPTION			DATE																			