
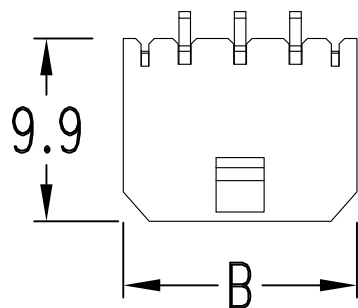


Features:

- 2 ~ 12 circuits available
- Material: LCP
- Tin-plated brass pin

Specification:

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25°C ~ 85°C

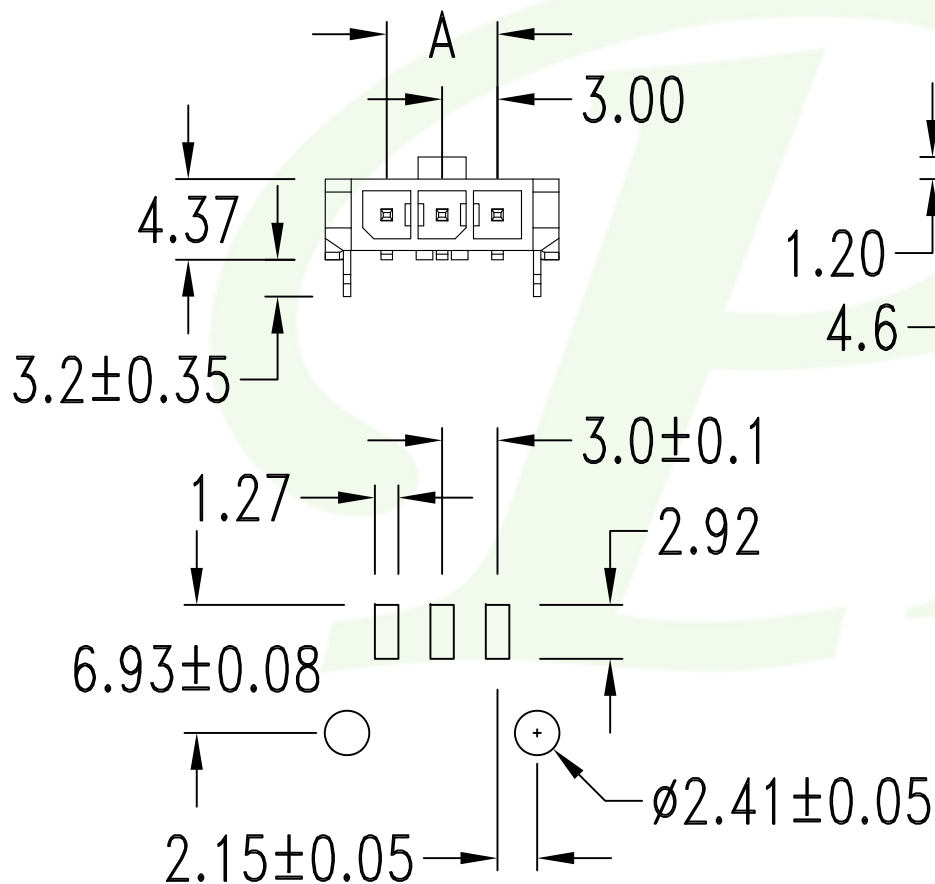

PCB Layout: Component side



733-9 7- xx T B Kx
1 2 3 4 5

1. 7: SMT R/A Single Row
2. No. of contacts
3. T: Tin plated
4. B: Black Insulator
5. Kx: Retention Clip

Circuits	Dim. A	Dim. B
2	3.0	9.65
3	6.0	12.65
4	9.0	15.65
5	12.0	18.65
6	15.0	21.65
7	18.0	24.65
8	21.0	27.65
9	24.0	30.65
10	27.0	33.65
11	30.0	36.65
12	33.0	39.65

			TOLERANCE		UNITS : mm		OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0 =±.30						3.0mm CONNECTOR SMT R/A		
			.00 =±.20				DRAWER 姜文慧	CHECK 李劍	Single Row RC,T/R		
			.000 =±.XXX								
A	RELEASE	2020/11/18	.0000=±.		SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李劍	NEW PART NO. 733-97-xxTBKx	DRAW NO. 733-97-xxTBKx(網頁專用圖)
REV.	DESCRIPTION	DATE	ANG.=±3'								