



Shown with disposable cap


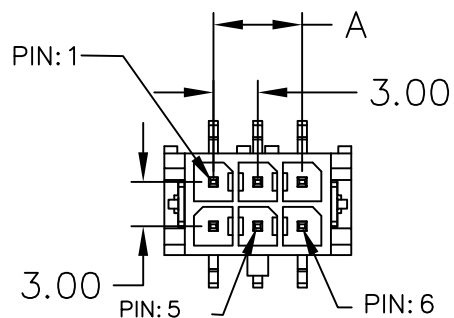


Features:

- 2 ~ 24 circuits available
- Material: LCP
- Tin-plated brass pin

Specification:

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25°C ~ 85°C

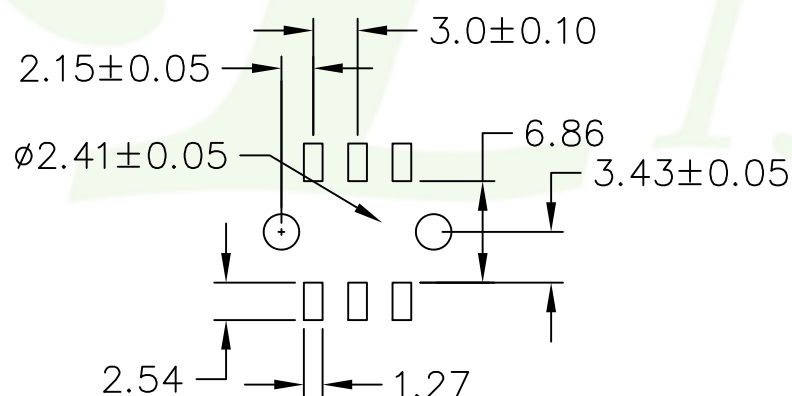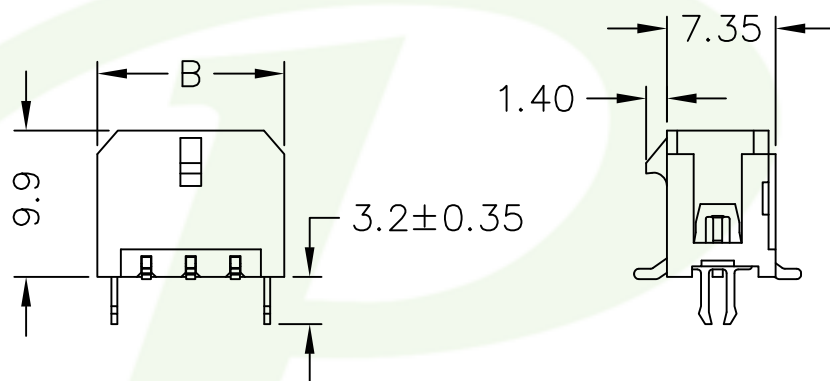

PCB Layout: Component side

1. 6: SMT S/T Dual Rows
2. No. of contacts
3. T: Tin plated
4. B: Black Insulator
5. Kx: Retention Clip

733-9 6- xx T B Kx
1 2 3 4 5

Circuits	Dim. A	Dim. B
2		6.65
4	3.0	9.65
6	6.0	12.65
8	9.0	15.65
10	12.0	18.65
12	15.0	21.65
14	18.0	24.65
16	21.0	27.65
18	24.0	30.65
20	27.0	33.65
22	30.0	36.65
24	33.0	39.65



			TOLERANCE				OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0	=±.30	UNITS : mm		DRAWER 姜文慧		3.0mm CONNECTOR SMT		
			.00	=±.20			CHECK 李劍		S/T Dual Rows RC,CAP+T/R		
			.000	=±.XXX			APP'D 李劍				
A RELEASE			.0000=±.		SCALE NONE		SHEET 1 OF 1		NEW PART NO.		
REV. DESCRIPTION			ANG.=±3'		SIZE A4		REV. A		733-96-xxTBKx		
									DRAW NO.		
									733-96-xxTBKx(網頁專用圖)		