
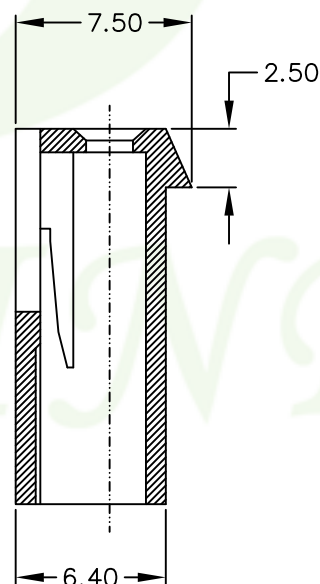
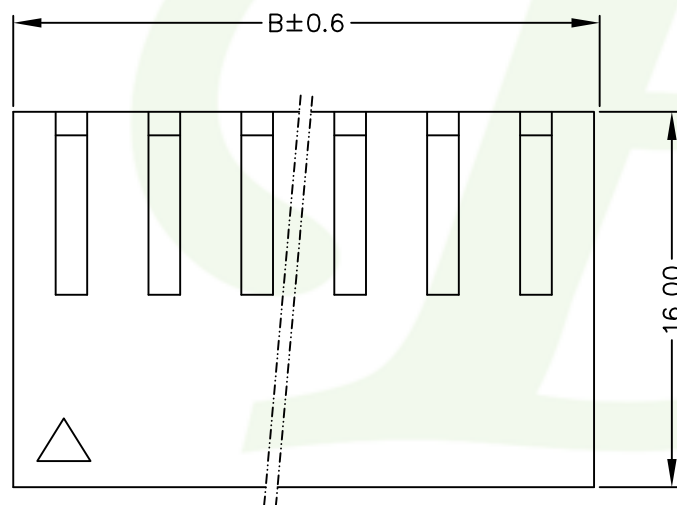


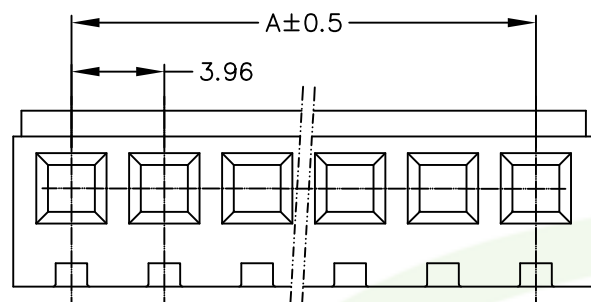

Specifications

Voltage Rating: 250V AC/DC

Current Rating: 7A AC/DC

Contact Resistance: 20mΩmax.

Withstanding Voltage: 1500V AC/minute.

Insulation Resistance: 1000MΩ min.

Temperature Range: -25°C~+85°C

Material


Circuits: 2~14

Insulator: Nylon 66 UL 94V-2

731-7 5-xx W xxx
1 2 3 4 5

1. 7: Green Product
2. 5: Housing
3. No. of contacts per row
4. W: Nature Color Insulator
5. Pinrex internal code.

Poles	A	B
2	3.96	8.92
3	7.92	12.88
4	11.88	16.84
5	15.84	20.80
6	19.80	24.76
7	23.76	28.72
8	27.72	32.68
9	31.68	36.64
10	35.64	40.60
11	39.60	44.56
12	43.56	48.52
13	47.52	52.48
14	51.48	56.44

			TOLERANCE		 UNITS : mm	OLD PART NO.		TITLE 3.96mm HOUSING		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0 =±.30	.00 =±.20						
			.000 =±.XXX	.0000=±.	SCALE NONE SIZE A4	SHEET 1 OF 1 REV. A	DRAWER 麦文慧 CHECK 李剑 APP'D 李剑	NEW PART NO. 731-75-xxWxxx	DRAW NO. 731-75-xxWxxx (網頁專用圖)	
A	RELEASE	2020/11/20	ANG.=±3'							
REV.	DESCRIPTION	DATE								