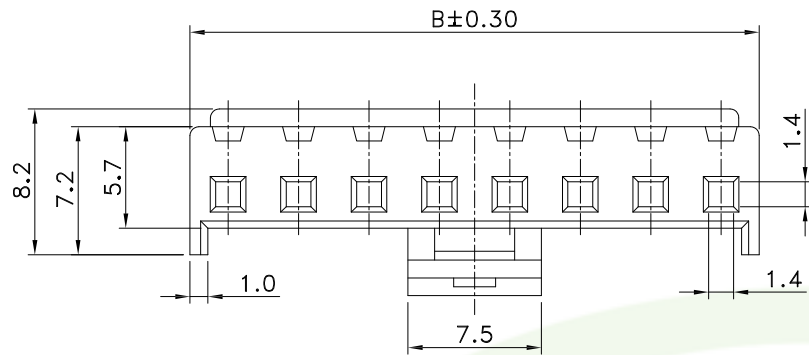






SECTION: A-A

Specifications
 Voltage Rating: 250V AC/DC
 Current Rating: 7A AC/DC
 Contact Resistance: 10mΩmax.
 Withstanding Voltage: 1500V AC/minute.
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25°C~+85°C


Material
 Circuits: 2~15
 Insulator: Nylon 66 UL 94V-0

732-7 5-xx W xxx
 1 2 3 4 5

1. 7: Green Product
2. 5: Housing
3. No. of contacts
4. W: Nature Color Insulator
5. Pinrex internal code.

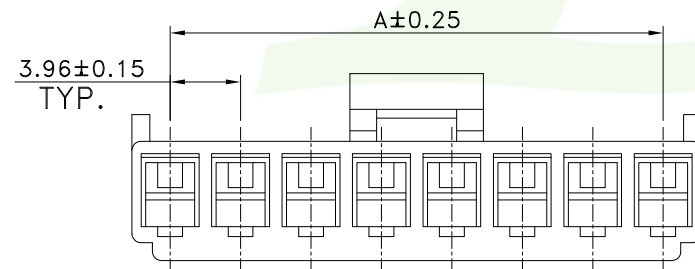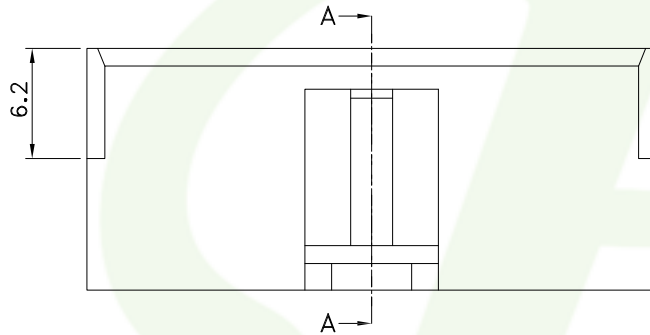

2Pin VIEW

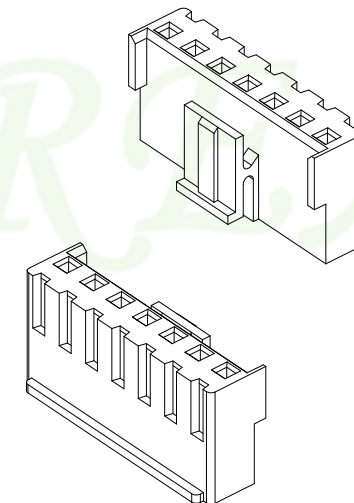

3D VIEW

Poles	Dimensions (mm)	
	A	B
2	3.96	8.25
3	7.92	12.21
4	11.88	16.17
5	15.84	20.13
6	19.80	24.09
7	23.76	28.05
8	27.72	32.01
9	31.68	35.97
10	35.64	39.93
11	39.60	43.89
12	43.56	47.85
13	47.52	51.81
14	51.48	55.77
15	55.44	59.73

			TOLERANCE		 UNITS : mm	OLD PART NO.		TITLE 3.96mm HOUSING		頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0 = ±.30			DRAWER 麦文慧	CHECK 李剑			
			.00 = ±.20		SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李剑	
A	RELEASE	2020/11/19	.000 = ±.XXX						NEW PART NO. 732-75-xxWxxx	DRAW NO. 732-75-xxWxxx (網頁專用圖)
REV.	DESCRIPTION	DATE	ANG.=±3'							