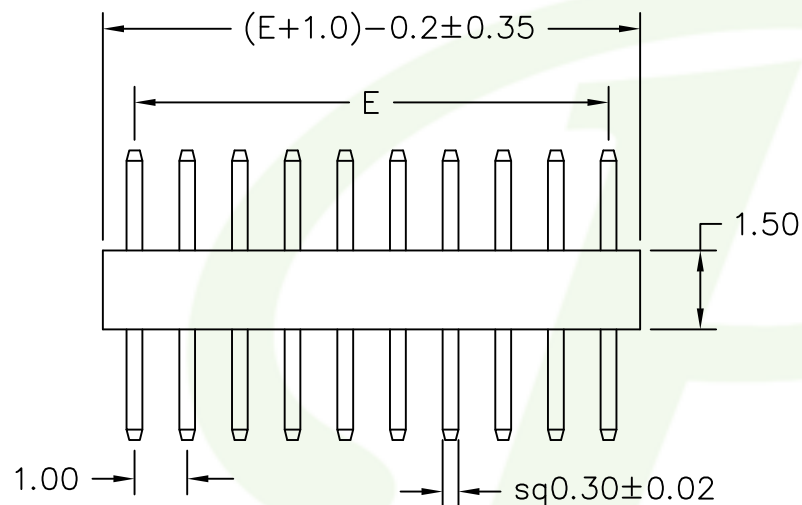
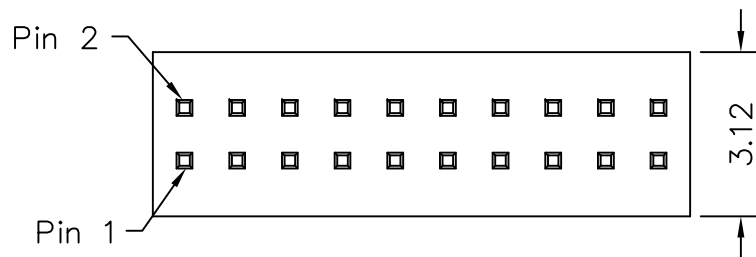


Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

Insulator : Thermoplastic High Temp UL94-V0


SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

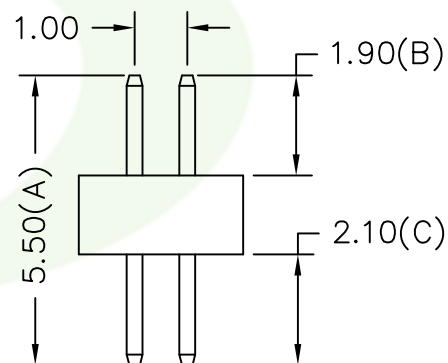

250-x 7-xx x x xx
1 2 3 4 5 6

- 5: Normal Parts
- 7: Green Product
- 9: Green Product High Temp
- 7: Dual rows
- Plastic Height=1.5mm
- No. of contacts per row
- 6: Gold flash
- S: Selective
- T: Tin plated
- B: Black Insulator
- Pinrex internal code.

POLES	DIM E	POLES	DIM E	POLES	DIM E
2	1.00	19	18.00	35	34.00
3	2.00	20	19.00	36	35.00
4	3.00	21	20.00	37	36.00
5	4.00	22	21.00	38	37.00
6	5.00	23	22.00	39	38.00
7	6.00	24	23.00	40	39.00
8	7.00	25	24.00	41	40.00
9	8.00	26	25.00	42	41.00
10	9.00	27	26.00	43	42.00
11	10.00	28	27.00	44	43.00
12	11.00	29	28.00	45	44.00
13	12.00	30	29.00	46	45.00
14	13.00	31	30.00	47	46.00
15	14.00	32	31.00	48	47.00
16	15.00	33	32.00	49	48.00
17	16.00	34	33.00	50	49.00
18	17.00				



發行章

			TOLERANCE		UNITS : mm		OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0	±.30					PIN HEADER 1.0*1.0mm		
			.00	±.25					SMT S/T TYPE, DUAL ROWS		
			.000	±.XXX					HEIGHT=1.5mm		
A	RELEASE	2020/10/23	.0000=±.		SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
REV.	DESCRIPTION	DATE	ANG.=±3'		NONE	A4	1 OF 1	A	李劍	250-x7-xxxxxx	250-x7-xxxxxx(網頁專用圖)